

Version : **2023.01**

Last update : 2023/12/17 05:48

DOE602 - Getting started with Docker

Contents


- **DOE602 - Getting started with Docker**
 - Contents
 - Introduction to Docker
 - Virtualisation and Containerisation
 - The AUFS File System
 - OverlayFS and Overlay2
 - Docker Daemon and Docker Engine
 - Docker CE and Docker EE
 - Docker CE
 - Docker EE
 - Docker and Mirantis
 - LAB #1 - Working with Docker
 - 1.1 - Installing docker on Linux
 - Debian 11
 - CentOS 8
 - 1.2 - Starting a Container
 - 1.3 - Viewing the list of Containers and Images
 - 1.4 - Searching for an Image in a Repository
 - 1.5 - Deleting a Container from an Image
 - 1.6 - Creating an Image from a Modified Container
 - 1.7 - Deleting an Image
 - 1.8 - Creating a Container with a Specific Name
 - 1.9 - Executing a Command in a Container
-

- 1.10 - Injecting Environment Variables into a Container
- 1.11 - Modifying a Container Host Name
- 1.12 - Mapping Container Ports
- 1.13 - Starting a Container in Detached mode
- 1.14 - Accessing Container Services from the Outside
- 1.15 - Stopping and Starting a Container
- 1.16 - Using Signals with a Container
- 1.17 - Forcing the deletion of a running Container
- 1.18 - Simply using a Volume
- 1.19 - Downloading an image without creating a Container
- 1.20 - Attaching to a running Container
- 1.21 - Installing software in a Container
- 1.22 - Using the docker commit command
- 1.23 - Connecting to the container from the outside

Introduction to Docker


Virtualisation and Containerisation

Traditional virtualisation requires the use of a hypervisor:

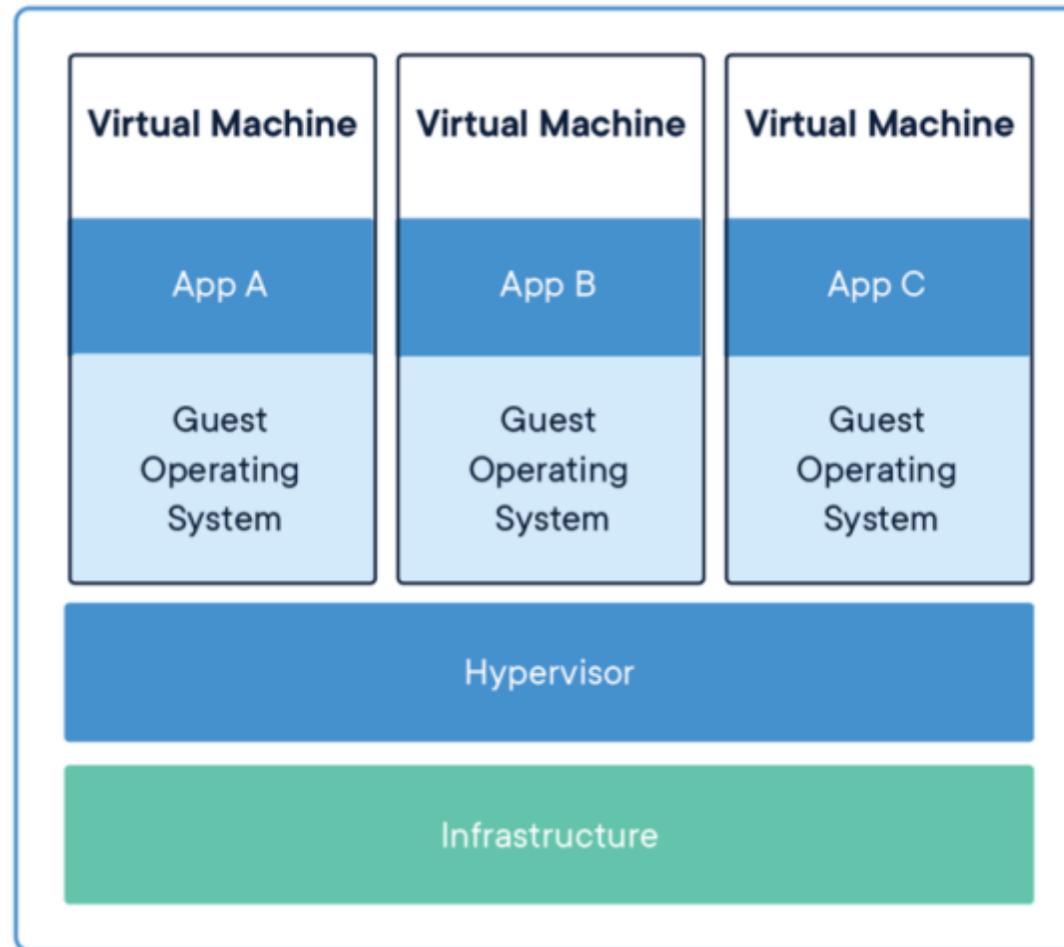

Docker is a lightweight virtualisation application launched in 2013 that uses **images** and **containers**.

Docker consists of three components: a server, a client and one or more repositories:

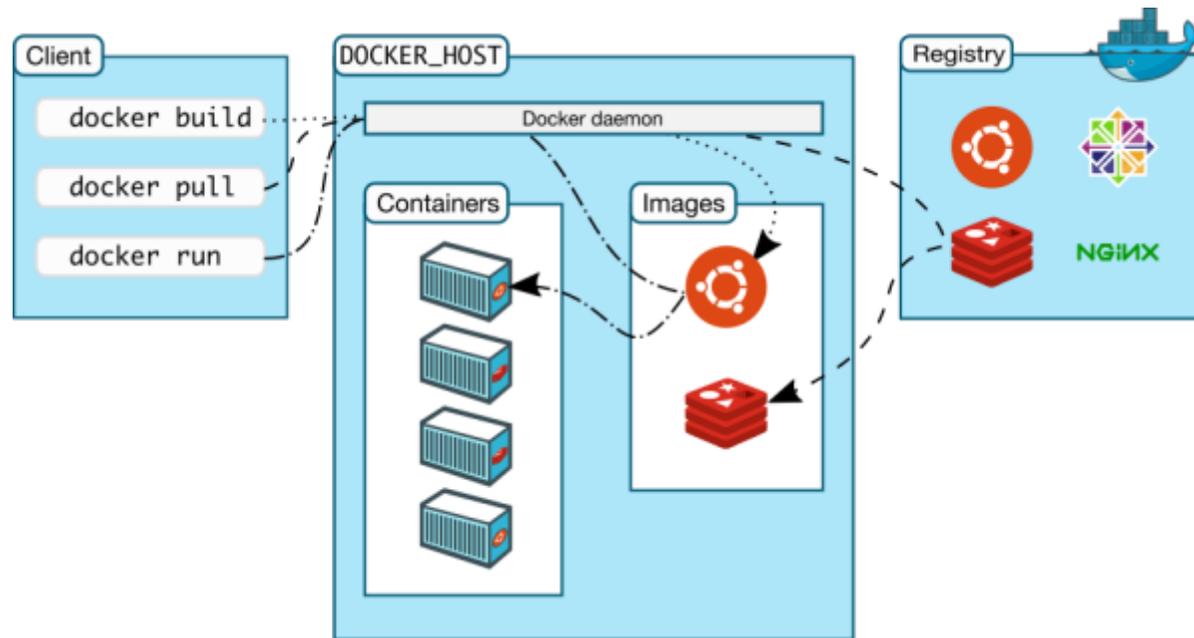


An **image** is an executable package containing everything needed to run a given piece of software, including :

- the code
- a runtime
- libraries
- environment variables
- configuration files


A **container** is an instance of the image running in memory. It is isolated from the host environment by default but can access host files and ports depending on configuration.

Containers run applications natively using the kernel of the host machine. As a result, the performance of a container is superior to that of a virtual machine, which has to go through a hypervisor to access the host machine's resources.

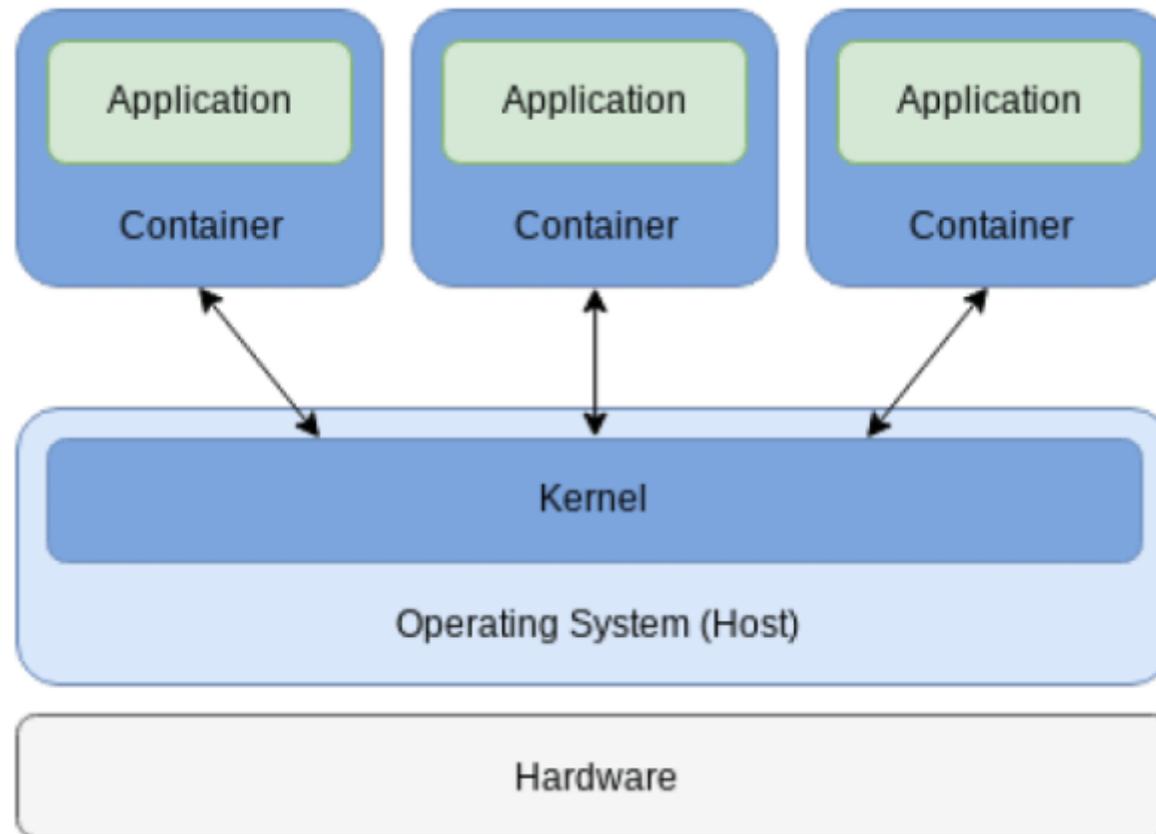


The AUFS file system

To manage the container file system, Docker initially used the AUFS filesystem. AUFS is a file system in the UnionFS family. A UnionFS file system assembles multiple directories on top of each other and then presents them in the form of a single directory containing the most recent objects using a union mount. AUFS directories are called **branches** and are located in **`/var/lib/docker/aufs`** :

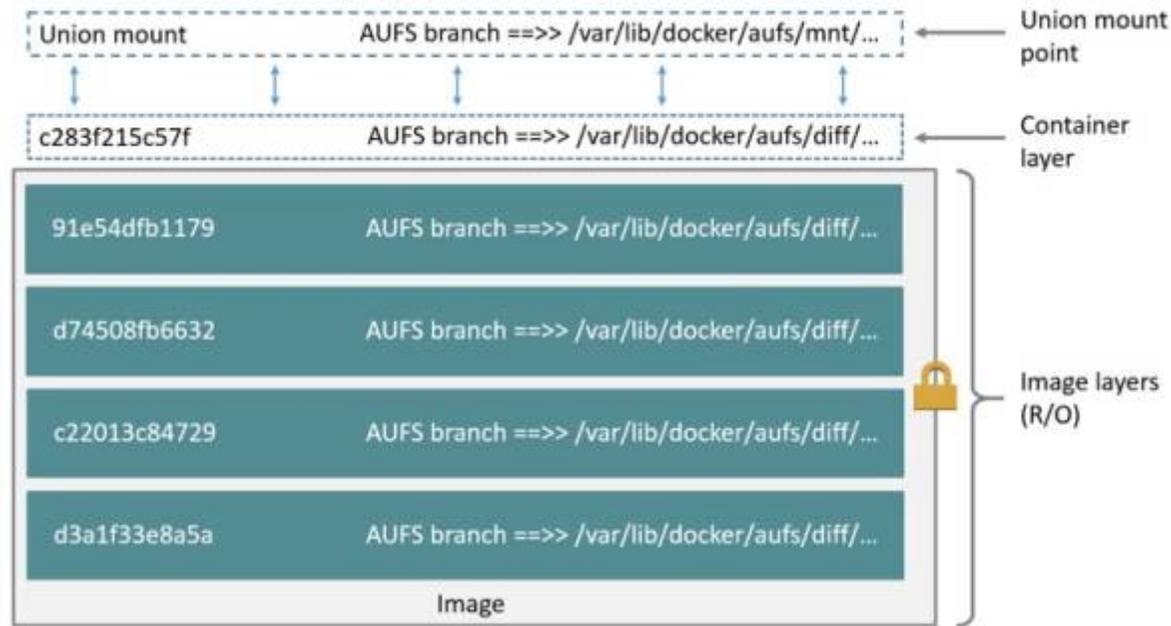

OverlayFS and Overlay2

The AUFS file system was then replaced in Docker by the **OverlayFS** file system. This file system combines two directories called **Layers**. The bottom layer is called **lowerdir** and the top layer is called **upperdir**. The unified view is called **merged**. If the container and image layers contain the same object, the container “wins” and hides the object in the image:

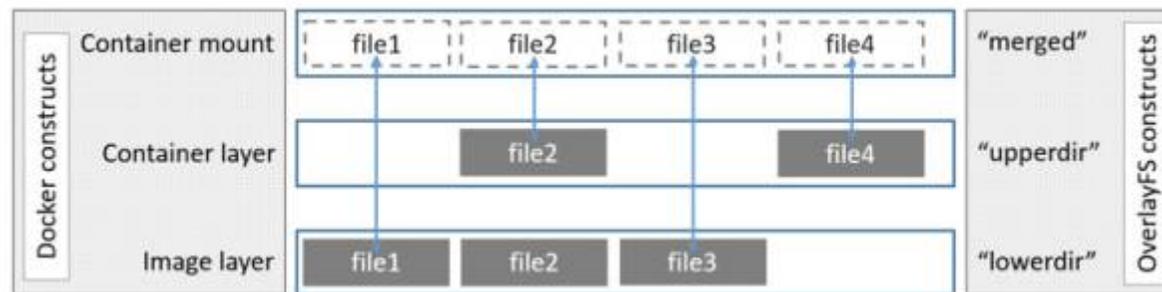

The OverlayFS file system can only manage two levels. This implies excessive use of inodes in the case of a multi-level image, as each image must reside in its own directory, which is located in **/var/lib/docker/overlay**. Physical links are then used to reference data in the lower levels.

This limitation led to the introduction of the **Overlay2** file system currently used by Docker. Overlay2 is capable of handling 128 layers.



Important - Note that Docker can also use the BTRFS file system.

Docker Daemon and Docker Engine

The Docker Daemon, called **dockerd**, along with the REST API and Docker CLI are collectively called the **Docker Engine** :

- The Docker Daemon is the server,
- The Docker CLI is the client,
- The REST API enables communication between the server and the client.

The Docker Engine can use **plugins**. These plugins, available for download from the public **Docker Registry**, called the **Docker Hub**, add extra functionality to the Docker Engine. Currently, plugins exist for :

- Volumes (sharing and reusing volumes between containers, backups and migration),
- Network,
- Authorization,
- Cloud (AWS, GCP and Azure),
- Jenkins.

You can also create your own plugin.

Docker CE and Docker EE

Docker CE

Docker comes in two versions **Docker CE** (Docker Community Edition) and **Docker EE** (Docker Enterprise Edition).

Docker CE is :

- open source software,
- free of charge.

Docker CE comes in two sub-versions:

- **Stable** - updated every three months. Stability is guaranteed,
- **Edge** - updated every month and contains new features but sometimes at the cost of stability.

Docker EE

Docker EE is :

- more powerful than the Docker CE version,
- available for different processors (x86-64, ARM, IBM Z, s390x IBM Z).

Docker EE includes:

- Docker Engine Enterprise,
 - Docker Engine, which is commercially supported. It can be used to create images and containers,
 - Docker Universal Control Plane (UCP),
 - is divided into two components: UCP Worker and UCP Manager,
 - allows applications to be deployed and is designed for high availability,
 - allows several UCP Manager nodes to be linked together as a cluster,
 - Docker Trusted Registry (DTR),
 - a secure image storage solution,
 - is designed for horizontal scalability,
 - Docker Desktop Enterprise (DDE),
-

- a Windows and Mac application that enables local construction of Docker images, support for multiple IDEs and native integration of Docker with the OS.

Docker EE is available in three sub-versions, known as **Tiers**:

- **Basic** - (official Docker support (J) and certified containers and plugins),
 - \$1,500 per node per year (2022),
- **Standard** - (**Basic + advanced image and container management, support for user authentication via LDAP/AD, RBAC**), * **\$3,000 per node per year (2022)**, * **Advanced** - (Standard + security scanning and continuous vulnerability monitoring),
 - \$3,500 per node per year (2022).

To see the differences between the two versions, go to <https://docs.docker.com/engine/installation/>.

Docker and Mirantis

Docker EE was acquired by **Mirantis** in November 2019.

As a result, Mirantis has renamed certain Docker EE components:

- Docker Enterprise/UCP -> Mirantis Kubernetes Engine (MKE),
- Docker Trusted Registry (DTR) -> Mirantis Secure Registry (MSR),
- Docker Engine Enterprise -> Mirantis container Runtime,
- Docker Enterprise Container Cloud -> Mirantis Container Cloud.

LAB #1 - Working with Docker

Docker is available for Windows™ and Mac as binary :

Platform	x86_64 / amd64
Docker Desktop for macOS	pkg
Docker Desktop for Windows™	exe or msi

Docker is available for Linux as an rpm or deb package:

Platform	x86_64 / amd64	ARM	ARM64 / AARCH64
CentOS	rpm		rpm
Fedora	rpm		rpm
Debian	deb	deb	deb
Ubuntu	deb	deb	deb
Raspian		deb	deb

Packages are available either from the Docker repository or from the OS package manager. Docker can also be installed using automated scripts provided by Docker.

Please note that since the names of Docker packages have changed, you should uninstall any previous version of Docker before installing the current version:

For example under Debian and Ubuntu:

```
# apt-get remove docker docker-engine docker.io containerd runc
```

Under CentOS and Fedora:

```
# yum remove docker docker-client docker-client-latest docker-latest docker-common docker-engine docker-logrotate docker-latest-logrotate
```

Docker is available in three channels:

- **Stable,**
 - The latest GA (General Availability) version,
- **Test,**
 - The pre-release version,
- **Nightly,**
 - An unstable version of work in progress.

1.1 - Installing docker under Linux

Debian 11

Docker is not in the Debian repositories. In order to install it, you need to add the docker repository. First, you need to install the packages that allow Debian to use an https repository:

```
root@debian11:~# apt-get update
...
root@debian11:~# apt-get install apt-transport-https ca-certificates curl gnupg2 software-properties-common
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
ca-certificates is already the newest version (20210119).
gnupg2 is already the newest version (2.2.27-2+deb11u2).
The following packages were automatically installed and are no longer required:
 libopengl0 linux-headers-5.10.0-15-amd64 linux-headers-5.10.0-15-common
Use 'apt autoremove' to remove them.
The following additional packages will be installed:
 python3-distro-info python3-software-properties unattended-upgrades
Suggested packages:
 bsd-mailx default-mta | mail-transport-agent needrestart powermgmt-base
The following NEW packages will be installed:
 apt-transport-https curl python3-distro-info python3-software-properties
 software-properties-common unattended-upgrades
0 upgraded, 6 newly installed, 0 to remove and 0 not upgraded.
Need to get 661 kB of archives.
After this operation, 1,567 kB of additional disk space will be used.
Do you want to continue? [Y/n] y
```

Download the official docker GPG key:

```
root@debian11:~# curl -fsSL https://download.docker.com/linux/debian/gpg | apt-key add -
Warning: apt-key is deprecated. Manage keyring files in trusted.gpg.d instead (see apt-key(8)).
OK
```

Check that the key ID is **9DC8 5822 9FC7 DD38 854A E2D8 8D81 803C 0EBF CD88** :

```
root@debian11:~# apt-key fingerprint 0EBFCD88
Warning: apt-key is deprecated. Manage keyring files in trusted.gpg.d instead (see apt-key(8)).
pub rsa4096 2017-02-22 [SCEA]
     9DC8 5822 9FC7 DD38 854A E2D8 8D81 803C 0EBF CD88
uid [ unknown] Docker Release (CE deb) <docker@docker.com>
sub rsa4096 2017-02-22 [S]
```

Add the **stable** docker repository:

```
root@debian11:~# add-apt-repository "deb [arch=amd64] https://download.docker.com/linux/debian $(lsb_release -cs)
stable"
```



Important - Note that the **lsb_release -cs** command returns the name of the Debian distribution, which in this case is **stretch**.

Now install the **docker-ce** package:

```
root@debian11docker:~# apt-get update
...
root@debian11:~# apt-get install docker-ce
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
The following packages were automatically installed and are no longer required:
  libopengl0 linux-headers-5.10.0-15-amd64 linux-headers-5.10.0-15-common
```

```

Use 'apt autoremove' to remove them.
The following additional packages will be installed:
  containerd.io docker-buildx-plugin docker-ce-cli docker-ce-rootless-extras
  docker-compose-plugin git git-man liberror-perl libslirp0 pigz slirp4netns
Suggested packages:
  aufs-tools cgroupfs-mount | cgroup-lite git-daemon-run | git-daemon-sysvinit
  git-doc git-el git-email git-gui gitk gitweb git-cvs git-mediawiki git-svn
The following NEW packages will be installed:
  containerd.io docker-buildx-plugin docker-ce docker-ce-cli
  docker-ce-rootless-extras docker-compose-plugin git git-man liberror-perl
  libslirp0 pigz slirp4netns
0 upgraded, 12 newly installed, 0 to remove and 0 not upgraded.
Need to get 121 MB of archives.
After this operation, 452 MB of additional disk space will be used.
Do you want to continue? [Y/n] y

```

Lastly, check the version of Docker client and server:

```

root@debian11:~# docker version
Client: Docker Engine - Community[root@centos8 ~]# yum remove podman
Dependencies resolved.
=====
Package           Arch    Version                               Repository    Size
=====
Removing:
podman            x86_64  3.3.1-9.module_el8.5.0+988+b1f0b741  @appstream   48 M
Removing dependent packages:
cockpit-podman   noarch  33-1.module_el8.5.0+890+6b136101     @appstream   438 k
Removing unused dependencies:
common           x86_64  2:2.0.29-1.module_el8.5.0+890+6b136101 @appstream   164 k
podman-catatonit x86_64  3.3.1-9.module_el8.5.0+988+b1f0b741  @appstream   760 k
Transaction Summary
=====

```

Remove 4 Packages

Freed space: 49 M

Is this ok [y/N]: y

Running transaction check

Transaction check succeeded.

Running transaction test

Transaction test succeeded.

Running transaction

Preparing	:		1/1
Running scriptlet:	cockpit-podman-33-1.module_el8.5.0+890+6b136101.noarch		1/1
Erasing	:	cockpit-podman-33-1.module_el8.5.0+890+6b136101.noarch	1/4
Erasing	:	podman-3.3.1-9.module_el8.5.0+988+b1f0b741.x86_64	2/4
Running scriptlet:	podman-3.3.1-9.module_el8.5.0+988+b1f0b741.x86_64		2/4
Erasing	:	podman-catatonit-3.3.1-9.module_el8.5.0+988+b1f0b741.x86_64	3/4
Erasing	:	conmon-2:2.0.29-1.module_el8.5.0+890+6b136101.x86_64	4/4
Running scriptlet:	conmon-2:2.0.29-1.module_el8.5.0+890+6b136101.x86_64		4/4
Verifying	:	cockpit-podman-33-1.module_el8.5.0+890+6b136101.noarch	1/4
Verifying	:	conmon-2:2.0.29-1.module_el8.5.0+890+6b136101.x86_64	2/4
Verifying	:	podman-3.3.1-9.module_el8.5.0+988+b1f0b741.x86_64	3/4
Verifying	:	podman-catatonit-3.3.1-9.module_el8.5.0+988+b1f0b741.x86_64	4/4

Installed products updated.

Removed:

```
cockpit-podman-33-1.module_el8.5.0+890+6b136101.noarch
conmon-2:2.0.29-1.module_el8.5.0+890+6b136101.x86_64
podman-3.3.1-9.module_el8.5.0+988+b1f0b741.x86_64
podman-catatonit-3.3.1-9.module_el8.5.0+988+b1f0b741.x86_64
```

Complete!

Version: 24.0.5

API version: 1.43

Go version: go1.20.6

Git commit: ced0996

```
Built:          Fri Jul 21 20:35:45 2023
OS/Arch: linux/amd64
Context: default
```

Server: Docker Engine - Community

Engine:

```
Version: 24.0.5
API version: 1.43 (minimum version 1.12)
Go version: go1.20.6
Git commit: a61e2b4
Built:          Fri Jul 21 20:35:45 2023
OS/Arch: linux/amd64
Experimental: false
```

containerd:

```
Version: 1.6.22
GitCommit:      8165feabfdfe38c65b599c4993d227328c231fca
```

runc:

```
Version: 1.1.8
GitCommit: v1.1.8-0-g82f18fe
```

docker-init:

```
Version: 0.19.0
GitCommit: de40ad0
```



Important - Note that the docker-ce package needs the **containerd.io** and **docker-ce-cli** packages. Also note that the above procedure installs the most recent version of Docker.

In the event that you wish to install a different version, you should first note the versions available:

```
root@debian11:~# apt-cache madison docker-ce
docker-ce | 5:24.0.5-1~debian.11~bullseye | https://download.docker.com/linux/debian bullseye/stable amd64
```

Packages

docker-ce | 5:24.0.4-1~debian.11~bullseye | <https://download.docker.com/linux/debian> bullseye/stable amd64

Packages

docker-ce | 5:24.0.3-1~debian.11~bullseye | <https://download.docker.com/linux/debian> bullseye/stable amd64

Packages

docker-ce | 5:24.0.2-1~debian.11~bullseye | <https://download.docker.com/linux/debian> bullseye/stable amd64

Packages

docker-ce | 5:24.0.1-1~debian.11~bullseye | <https://download.docker.com/linux/debian> bullseye/stable amd64

Packages

docker-ce | 5:24.0.0-1~debian.11~bullseye | <https://download.docker.com/linux/debian> bullseye/stable amd64

Packages

docker-ce | 5:23.0.6-1~debian.11~bullseye | <https://download.docker.com/linux/debian> bullseye/stable amd64

Packages

docker-ce | 5:23.0.5-1~debian.11~bullseye | <https://download.docker.com/linux/debian> bullseye/stable amd64

Packages

docker-ce | 5:23.0.4-1~debian.11~bullseye | <https://download.docker.com/linux/debian> bullseye/stable amd64

Packages

docker-ce | 5:23.0.3-1~debian.11~bullseye | <https://download.docker.com/linux/debian> bullseye/stable amd64

Packages

docker-ce | 5:23.0.2-1~debian.11~bullseye | <https://download.docker.com/linux/debian> bullseye/stable amd64

Packages

docker-ce | 5:23.0.1-1~debian.11~bullseye | <https://download.docker.com/linux/debian> bullseye/stable amd64

Packages

docker-ce | 5:23.0.0-1~debian.11~bullseye | <https://download.docker.com/linux/debian> bullseye/stable amd64

Packages

docker-ce | 5:20.10.24~3-0~debian-bullseye | <https://download.docker.com/linux/debian> bullseye/stable amd64

Packages

docker-ce | 5:20.10.23~3-0~debian-bullseye | <https://download.docker.com/linux/debian> bullseye/stable amd64

Packages

docker-ce | 5:20.10.22~3-0~debian-bullseye | <https://download.docker.com/linux/debian> bullseye/stable amd64

Packages

docker-ce | 5:20.10.21~3-0~debian-bullseye | <https://download.docker.com/linux/debian> bullseye/stable amd64

Packages

docker-ce | 5:20.10.20~3-0~debian-bullseye | <https://download.docker.com/linux/debian> bullseye/stable amd64

```
Packages
docker-ce | 5:20.10.19~3-0~debian-bullseye | https://download.docker.com/linux/debian bullseye/stable amd64
Packages
docker-ce | 5:20.10.18~3-0~debian-bullseye | https://download.docker.com/linux/debian bullseye/stable amd64
Packages
docker-ce | 5:20.10.17~3-0~debian-bullseye | https://download.docker.com/linux/debian bullseye/stable amd64
Packages
docker-ce | 5:20.10.16~3-0~debian-bullseye | https://download.docker.com/linux/debian bullseye/stable amd64
Packages
docker-ce | 5:20.10.15~3-0~debian-bullseye | https://download.docker.com/linux/debian bullseye/stable amd64
Packages
docker-ce | 5:20.10.14~3-0~debian-bullseye | https://download.docker.com/linux/debian bullseye/stable amd64
Packages
docker-ce | 5:20.10.13~3-0~debian-bullseye | https://download.docker.com/linux/debian bullseye/stable amd64
Packages
docker-ce | 5:20.10.12~3-0~debian-bullseye | https://download.docker.com/linux/debian bullseye/stable amd64
Packages
docker-ce | 5:20.10.11~3-0~debian-bullseye | https://download.docker.com/linux/debian bullseye/stable amd64
Packages
docker-ce | 5:20.10.10~3-0~debian-bullseye | https://download.docker.com/linux/debian bullseye/stable amd64
Packages
docker-ce | 5:20.10.9~3-0~debian-bullseye | https://download.docker.com/linux/debian bullseye/stable amd64
Packages
docker-ce | 5:20.10.8~3-0~debian-bullseye | https://download.docker.com/linux/debian bullseye/stable amd64
Packages
docker-ce | 5:20.10.7~3-0~debian-bullseye | https://download.docker.com/linux/debian bullseye/stable amd64
Packages
docker-ce | 5:20.10.6~3-0~debian-bullseye | https://download.docker.com/linux/debian bullseye/stable amd64
Packages
```

In the event that you want to install Docker version **24.0.1**, the installation command would become:

```
# apt-get install docker-ce=5:24.0.1-1~debian.11~bullseye docker-ce-cli=5:24.0.1-1~debian.11~bullseye
containerd.io
```

If you prefer to use the Docker installation script, you should download it first:



Important - Note that these scripts should not be used in a production environment.

```
root@debian11:~# curl -fsSL https://get.docker.com -o get-docker.sh
```

```
root@debian11:~# ls
get-docker.sh
```

Next, we need to run the script:

```
root@debian11:~# chmod +x get-docker.sh
```

```
root@debian11:~# ./get-docker.sh
# Executing docker install script, commit: c2de0811708b6d9015ed1a2c80f02c9b70c8ce7b
Warning: the "docker" command appears to already exist on this system.
```

If you already have Docker installed, this script can cause trouble, which is why we're displaying this warning and provide the opportunity to cancel the installation.

If you installed the current Docker package using this script and are using it again to update Docker, you can safely ignore this message.

```
You may press Ctrl+C now to abort this script.
+ sleep 20
^C
```





Important - Note the use of **^C** to NOT continue executing the script.

Start a hello-world image container:

```
root@debian11:~# docker run hello-world
Unable to find image 'hello-world:latest' locally
latest: Pulling from library/hello-world
719385e32844: Pull complete
Digest: sha256:dcba6daec718f547568c562956fa47e1b03673dd010fe6ee58ca806767031d1c
Status: Downloaded newer image for hello-world:latest
```

Hello from Docker!

This message shows that your installation appears to be working correctly.

To generate this message, Docker took the following steps:

1. The Docker client contacted the Docker daemon.
2. The Docker daemon pulled the "hello-world" image from the Docker Hub.
(amd64)
3. The Docker daemon created a new container from that image which runs the executable that produces the output you are currently reading.
4. The Docker daemon streamed that output to the Docker client, which sent it to your terminal.

To try something more ambitious, you can run an Ubuntu container with:

```
$ docker run -it ubuntu bash
```

Share images, automate workflows, and more with a free Docker ID:

<https://hub.docker.com/>

For more examples and ideas, visit:

<https://docs.docker.com/get-started/>



Important - Note that if the image used to generate the container is not present on the host system, it is automatically downloaded from a repository (by default the **docker.io** repository) using the **docker pull** command.

CentOS 8

Connect to your **CentOS_10.0.3.45_SSH** VM from your **Debian_10.0.3.46_SSH** VM :

```
root@debian11:~# ssh -l trainee 10.0.3.45
The authenticity of host '10.0.3.45 (10.0.3.45)' can't be established.
ECDSA key fingerprint is SHA256:Q7T/CP0SLiMbMAIgVzTuEHegYS/spPE5zzQchCHD5Vw.
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added '10.0.3.45' (ECDSA) to the list of known hosts.
trainee@10.0.3.45's password: trainee
Activate the web console with: systemctl enable --now cockpit.socket

Last login: Wed Nov 15 05:24:16 2023 from 10.0.3.1
[trainee@centos8 ~]$
```

Become the root user:

```
[trainee@centos8 ~]$ su -
Password: fenestros
[root@centos8 ~]#
```

Add the docker repository:

```
[root@centos8 ~]# yum install -y yum-utils
```

```
Last metadata expiration check: 0:05:37 ago on Fri 18 Aug 2023 15:53:49 CEST.  
Package yum-utils-4.0.21-3.el8.noarch is already installed.  
Dependencies resolved.  
Nothing to do.  
Complete!
```

```
[root@centos8 ~]# yum-config-manager --add-repo https://download.docker.com/linux/centos/docker-ce.repo  
Adding repo from: https://download.docker.com/linux/centos/docker-ce.repo
```

Remove the **podman** package and install **Docker** :

```
[root@centos8 ~]# yum remove podman  
Dependencies resolved.
```

```
=====
```

Package	Arch	Version	Repository	Size
Removing:				
podman	x86_64	3.3.1-9.module_el8.5.0+988+b1f0b741	@appstream	48 M
Removing dependent packages:				
cockpit-podman	noarch	33-1.module_el8.5.0+890+6b136101	@appstream	438 k
Removing unused dependencies:				
conmon	x86_64	2:2.0.29-1.module_el8.5.0+890+6b136101	@appstream	164 k
podman-catatonit	x86_64	3.3.1-9.module_el8.5.0+988+b1f0b741	@appstream	760 k

```
Transaction Summary
```

```
=====
```

Remove 4 Packages

```
Freed space: 49 M  
Is this ok [y/N]: y  
Running transaction check  
Transaction check succeeded.  
Running transaction test  
Transaction test succeeded.
```

Running transaction

```
Preparing           :                               1/1
Running scriptlet: cockpit-podman-33-1.module_el8.5.0+890+6b136101.noarch 1/1
Erasing           : cockpit-podman-33-1.module_el8.5.0+890+6b136101.noarch 1/4
Erasing           : podman-3.3.1-9.module_el8.5.0+988+b1f0b741.x86_64 2/4
Running scriptlet: podman-3.3.1-9.module_el8.5.0+988+b1f0b741.x86_64 2/4
Erasing           : podman-catatonit-3.3.1-9.module_el8.5.0+988+b1f0b741.x86_6 3/4
Erasing           : conmon-2:2.0.29-1.module_el8.5.0+890+6b136101.x86_64 4/4
Running scriptlet: conmon-2:2.0.29-1.module_el8.5.0+890+6b136101.x86_64 4/4
Verifying         : cockpit-podman-33-1.module_el8.5.0+890+6b136101.noarch 1/4
Verifying         : conmon-2:2.0.29-1.module_el8.5.0+890+6b136101.x86_64 2/4
Verifying         : podman-3.3.1-9.module_el8.5.0+988+b1f0b741.x86_64 3/4
Verifying         : podman-catatonit-3.3.1-9.module_el8.5.0+988+b1f0b741.x86_6 4/4
Installed products updated.
```

Removed:

```
cockpit-podman-33-1.module_el8.5.0+890+6b136101.noarch
conmon-2:2.0.29-1.module_el8.5.0+890+6b136101.x86_64
podman-3.3.1-9.module_el8.5.0+988+b1f0b741.x86_64
podman-catatonit-3.3.1-9.module_el8.5.0+988+b1f0b741.x86_64
```

Complete!

```
[root@centos8 ~]# yum install docker-ce docker-ce-cli containerd.io --alloweraseing
```

```
Last metadata expiration check: 0:05:43 ago on Fri 18 Aug 2023 16:04:20 CEST.
```

```
Dependencies resolved.
```

```
=====
Package Arch Version Repository Size
=====
```

Installing:

```
containerd.io x86_64 1.6.22-3.1.el8 docker-ce-stable 34 M
  replacing runc.x86_64 1.0.2-1.module_el8.5.0+911+f19012f9
docker-ce x86_64 3:24.0.5-1.el8 docker-ce-stable 24 M
docker-ce-cli x86_64 1:24.0.5-1.el8 docker-ce-stable 7.2 M
```

Installing dependencies:

```
docker-ce-rootless-extras x86_64 24.0.5-1.el8 docker-ce-stable 4.9 M
libcgroup x86_64 0.41-19.el8 baseos 70 k
```

Installing weak dependencies:

```
docker-buildx-plugin x86_64 0.11.2-1.el8 docker-ce-stable 13 M
docker-compose-plugin x86_64 2.20.2-1.el8 docker-ce-stable 13 M
```

Removing dependent packages:

```
buildah x86_64 1.22.3-2.module_el8.5.0+911+f19012f9
                                     @appstream 28 M
containers-common noarch 2:1-2.module_el8.5.0+890+6b136101
                                     @appstream 236 k
```

Transaction Summary

```
=====
Install 7 Packages
```

```
Remove 2 Packages
```

```
Total download size: 96 M
```

```
Is this ok [y/N]: y
```

Transaction Summary

```
=====
Install 7 Packages
```

```
Remove 2 Packages
```

```
Total download size: 96 M
```

```
Is this ok [y/N]: y
```

Downloading Packages:

```
(1/7): libcgroup-0.41-19.el8.x86_64.rpm 279 kB/s | 70 kB 00:00
(2/7): docker-buildx-plugin-0.11.2-1.el8.x86_64.rpm 3.2 MB/s | 13 MB 00:04
(3/7): docker-ce-cli-24.0.5-1.el8.x86_64.rpm 3.1 MB/s | 7.2 MB 00:02
(4/7): docker-ce-24.0.5-1.el8.x86_64.rpm 2.0 MB/s | 24 MB 00:11
(5/7): containerd.io-1.6.22-3.1.el8.x86_64.rpm 1.6 MB/s | 34 MB 00:20
(6/7): docker-ce-rootless-extras-24.0.5-1.el8.x86_64. 322 kB/s | 4.9 MB 00:15
```

```
(7/7): docker-compose-plugin-2.20.2-1.el8.x86_64.rpm 961 kB/s | 13 MB 00:13
-----
Total 3.7 MB/s | 96 MB 00:25
Docker CE Stable - x86_64 67 kB/s | 1.6 kB 00:00
Importing GPG key 0x621E9F35:
  Userid : "Docker Release (CE rpm) <docker@docker.com>"
  Fingerprint: 060A 61C5 1B55 8A7F 742B 77AA C52F EB6B 621E 9F35
  From: https://download.docker.com/linux/centos/gpg
Is this ok [y/N]: y
Key imported successfully
Running transaction check
Transaction check succeeded.
Running transaction test
Transaction test succeeded.
Running transaction
  Preparing : 1/1
  Installing : docker-compose-plugin-2.20.2-1.el8.x86_64 1/10
  Running scriptlet: docker-compose-plugin-2.20.2-1.el8.x86_64 1/10
  Installing: docker-buildx-plugin-0.11.2-1.el8.x86_64 2/10
  Running scriptlet: docker-buildx-plugin-0.11.2-1.el8.x86_64 2/10
  Installing: docker-ce-cli-1:24.0.5-1.el8.x86_64 3/10
  Running scriptlet: docker-ce-cli-1:24.0.5-1.el8.x86_64 3/10
  Installing: containerd.io-1.6.22-3.1.el8.x86_64 4/10
  Running scriptlet: containerd.io-1.6.22-3.1.el8.x86_64 4/10
  Running scriptlet: libcgroupp-0.41-19.el8.x86_64 5/10
  Installing: libcgroupp-0.41-19.el8.x86_64 5/10
  Running scriptlet: libcgroupp-0.41-19.el8.x86_64 5/10
  Installing: docker-ce-rootless-extras-24.0.5-1.el8.x86_64 6/10
  Running scriptlet: docker-ce-rootless-extras-24.0.5-1.el8.x86_64 6/10
  Installing: docker-ce-3:24.0.5-1.el8.x86_64 7/10
  Running scriptlet: docker-ce-3:24.0.5-1.el8.x86_64 7/10
  Erasing : buildah-1.22.3-2.module_el8.5.0+911+f19012f9.x86_64 8/10
  Erasing : containers-common-2:1-2.module_el8.5.0+890+6b136101.noar 9/10
  Obsoleting : runc-1.0.2-1.module_el8.5.0+911+f19012f9.x86_64 10/10
```

```
Running scriptlet: runc-1.0.2-1.module_el8.5.0+911+f19012f9.x86_64 10/10
Verifying : libcgrouper-0.41-19.el8.x86_64 1/10
Verifying : containerd.io-1.6.22-3.1.el8.x86_64 2/10
Verifying : runc-1.0.2-1.module_el8.5.0+911+f19012f9.x86_64 3/10
Verifying : docker-buildx-plugin-0.11.2-1.el8.x86_64 4/10
Verifying : docker-ce-3:24.0.5-1.el8.x86_64 5/10
Verifying : docker-ce-cli-1:24.0.5-1.el8.x86_64 6/10
Verifying : docker-ce-rootless-extras-24.0.5-1.el8.x86_64 7/10
Verifying: docker-compose-plugin-2.20.2-1.el8.x86_64 8/10
Verifying : buildah-1.22.3-2.module_el8.5.0+911+f19012f9.x86_64 9/10
Verifying : containers-common-2:1-2.module_el8.5.0+890+6b136101.noar 10/10
Installed products updated.
```

Installed:

```
containerd.io-1.6.22-3.1.el8.x86_64
docker-buildx-plugin-0.11.2-1.el8.x86_64
docker-ce-3:24.0.5-1.el8.x86_64
docker-ce-cli-1:24.0.5-1.el8.x86_64
docker-ce-rootless-extras-24.0.5-1.el8.x86_64
docker-compose-plugin-2.20.2-1.el8.x86_64
libcgrouper-0.41-19.el8.x86_64
```

Removed:

```
buildah-1.22.3-2.module_el8.5.0+911+f19012f9.x86_64
containers-common-2:1-2.module_el8.5.0+890+6b136101.noarch
```

Complete!

Then start the docker service :

```
[root@centos8 ~]# systemctl status docker
● docker.service - Docker Application Container Engine
   Loaded: loaded (/usr/lib/systemd/system/docker.service; disabled; vendor preset: d>
   Active: inactive (dead)
     Docs: https://docs.docker.com
```



```
docker-ce.x86_64 3:24.0.4-1.el8 docker-ce-stable
docker-ce.x86_64 3:24.0.3-1.el8 docker-ce-stable
docker-ce.x86_64 3:24.0.2-1.el8 docker-ce-stable
docker-ce.x86_64 3:24.0.1-1.el8 docker-ce-stable
docker-ce.x86_64 3:24.0.0-1.el8 docker-ce-stable
docker-ce.x86_64 3:23.0.6-1.el8 docker-ce-stable
docker-ce.x86_64 3:23.0.5-1.el8 docker-ce-stable
docker-ce.x86_64 3:23.0.4-1.el8 docker-ce-stable
docker-ce.x86_64 3:23.0.3-1.el8 docker-ce-stable
docker-ce.x86_64 3:23.0.2-1.el8 docker-ce-stable
docker-ce.x86_64 3:23.0.1-1.el8 docker-ce-stable
docker-ce.x86_64 3:23.0.0-1.el8 docker-ce-stable
docker-ce.x86_64 3:20.10.9-3.el8 docker-ce-stable
docker-ce.x86_64 3:20.10.8-3.el8 docker-ce-stable
docker-ce.x86_64 3:20.10.7-3.el8 docker-ce-stable
docker-ce.x86_64 3:20.10.6-3.el8 docker-ce-stable
docker-ce.x86_64 3:20.10.5-3.el8 docker-ce-stable
docker-ce.x86_64 3:20.10.4-3.el8 docker-ce-stable
docker-ce.x86_64 3:20.10.3-3.el8 docker-ce-stable
docker-ce.x86_64 3:20.10.24-3.el8 docker-ce-stable
docker-ce.x86_64 3:20.10.2-3.el8 docker-ce-stable
docker-ce.x86_64 3:20.10.23-3.el8 docker-ce-stable
docker-ce.x86_64 3:20.10.22-3.el8 docker-ce-stable
docker-ce.x86_64 3:20.10.21-3.el8 docker-ce-stable
docker-ce.x86_64 3:20.10.20-3.el8 docker-ce-stable
docker-ce.x86_64 3:20.10.19-3.el8 docker-ce-stable
docker-ce.x86_64 3:20.10.18-3.el8 docker-ce-stable
docker-ce.x86_64 3:20.10.17-3.el8 docker-ce-stable
docker-ce.x86_64 3:20.10.16-3.el8 docker-ce-stable
docker-ce.x86_64 3:20.10.15-3.el8 docker-ce-stable
docker-ce.x86_64 3:20.10.14-3.el8 docker-ce-stable
docker-ce.x86_64 3:20.10.1-3.el8 docker-ce-stable
docker-ce.x86_64 3:20.10.13-3.el8 docker-ce-stable
docker-ce.x86_64 3:20.10.12-3.el8 docker-ce-stable
```

```
docker-ce.x86_64 3:20.10.11-3.el8 docker-ce-stable
docker-ce.x86_64 3:20.10.10-3.el8 docker-ce-stable
docker-ce.x86_64 3:20.10.0-3.el8 docker-ce-stable
docker-ce.x86_64 3:19.03.15-3.el8 docker-ce-stable
docker-ce.x86_64 3:19.03.14-3.el8 docker-ce-stable
docker-ce.x86_64 3:19.03.13-3.el8 docker-ce-stable
Available Packages
```

```
[root@centos8 ~]# yum list docker-ce-cli --showduplicates | sort -r
Last metadata expiration check: 0:08:33 ago on Thu 14 Dec 2023 09:52:33 EST.
docker-ce-cli.x86_64          1:24.0.7-1.el8          docker-ce-stable
docker-ce-cli.x86_64          1:24.0.6-1.el8          docker-ce-stable
docker-ce-cli.x86_64          1:24.0.5-1.el8          docker-ce-stable
docker-ce-cli.x86_64          1:24.0.4-1.el8          docker-ce-stable
docker-ce-cli.x86_64          1:24.0.3-1.el8          docker-ce-stable
docker-ce-cli.x86_64          1:24.0.2-1.el8          docker-ce-stable
docker-ce-cli.x86_64          1:24.0.1-1.el8          docker-ce-stable
docker-ce-cli.x86_64          1:24.0.0-1.el8          docker-ce-stable
docker-ce-cli.x86_64          1:23.0.6-1.el8          docker-ce-stable
docker-ce-cli.x86_64          1:23.0.5-1.el8          docker-ce-stable
docker-ce-cli.x86_64          1:23.0.4-1.el8          docker-ce-stable
docker-ce-cli.x86_64          1:23.0.3-1.el8          docker-ce-stable
docker-ce-cli.x86_64          1:23.0.2-1.el8          docker-ce-stable
docker-ce-cli.x86_64          1:23.0.1-1.el8          docker-ce-stable
docker-ce-cli.x86_64          1:23.0.0-1.el8          docker-ce-stable
docker-ce-cli.x86_64          1:20.10.9-3.el8         docker-ce-stable
docker-ce-cli.x86_64          1:20.10.8-3.el8         docker-ce-stable
docker-ce-cli.x86_64          1:20.10.7-3.el8         docker-ce-stable
docker-ce-cli.x86_64          1:20.10.6-3.el8         docker-ce-stable
docker-ce-cli.x86_64          1:20.10.5-3.el8         docker-ce-stable
docker-ce-cli.x86_64          1:20.10.4-3.el8         docker-ce-stable
docker-ce-cli.x86_64          1:20.10.3-3.el8         docker-ce-stable
docker-ce-cli.x86_64          1:20.10.24-3.el8        docker-ce-stable
docker-ce-cli.x86_64          1:20.10.2-3.el8         docker-ce-stable
```

```
docker-ce-cli.x86_64      1:20.10.23-3.el8      docker-ce-stable
docker-ce-cli.x86_64      1:20.10.22-3.el8      docker-ce-stable
docker-ce-cli.x86_64      1:20.10.21-3.el8      docker-ce-stable
docker-ce-cli.x86_64      1:20.10.20-3.el8      docker-ce-stable
docker-ce-cli.x86_64      1:20.10.19-3.el8      docker-ce-stable
docker-ce-cli.x86_64      1:20.10.18-3.el8      docker-ce-stable
docker-ce-cli.x86_64      1:20.10.17-3.el8      docker-ce-stable
docker-ce-cli.x86_64      1:20.10.16-3.el8      docker-ce-stable
docker-ce-cli.x86_64      1:20.10.15-3.el8      docker-ce-stable
docker-ce-cli.x86_64      1:20.10.14-3.el8      docker-ce-stable
docker-ce-cli.x86_64      1:20.10.1-3.el8       docker-ce-stable
docker-ce-cli.x86_64      1:20.10.13-3.el8      docker-ce-stable
docker-ce-cli.x86_64      1:20.10.12-3.el8      docker-ce-stable
docker-ce-cli.x86_64      1:20.10.11-3.el8      docker-ce-stable
docker-ce-cli.x86_64      1:20.10.10-3.el8      docker-ce-stable
docker-ce-cli.x86_64      1:20.10.0-3.el8       docker-ce-stable
docker-ce-cli.x86_64      1:19.03.15-3.el8      docker-ce-stable
docker-ce-cli.x86_64      1:19.03.14-3.el8      docker-ce-stable
docker-ce-cli.x86_64      1:19.03.13-3.el8      docker-ce-stable
Available Packages
```

In the event that you want to install Docker version **24.0.4**, the installation command would become:

```
# yum install docker-ce-3:24.0.4-1.el8 docker-ce-cli-1:24.0.4-1.el8 containerd.io --alloweraseing
```

If you prefer to use the Docker installation script, you should download it first:



Important - Note that these scripts should not be used in a production environment.

```
[root@centos8 ~]# curl -fsSL https://get.docker.com -o get-docker.sh
```

```
[root@centos8 ~]# ls
anaconda-ks.cfg Downloads Music Videos
CentOS-8.1.1911-x86_64-boot.iso get-docker.sh Pictures
Desktop home Public
Documents initial-setup-ks.cfg Templates
```

Next, we need to run the script:

```
[root@centos8 ~]# chmod +x get-docker.sh

[root@centos8 ~]# ./get-docker.sh
# Executing docker install script, commit: c2de0811708b6d9015ed1a2c80f02c9b70c8ce7b
Warning: the "docker" command appears to already exist on this system.

If you already have Docker installed, this script can cause trouble, which is
why we're displaying this warning and provide the opportunity to cancel the
installation.

If you installed the current Docker package using this script and are using it
again to update Docker, you can safely ignore this message.

You may press Ctrl+C now to abort this script.
+ sleep 20
^C
```



Important - Note the use of **^C** to NOT continue executing the script.

Start a hello-world image container:

```
[root@centos8 ~]# docker run hello-world
Unable to find image 'hello-world:latest' locally
```

```
latest: Pulling from library/hello-world
719385e32844: Pull complete
Digest: sha256:dcba6daec718f547568c562956fa47e1b03673dd010fe6ee58ca806767031d1c
Status: Downloaded newer image for hello-world:latest
```

Hello from Docker!

This message shows that your installation appears to be working correctly.

To generate this message, Docker took the following steps:

1. The Docker client contacted the Docker daemon.
2. The Docker daemon pulled the "hello-world" image from the Docker Hub.
(amd64)
3. The Docker daemon created a new container from that image which runs the executable that produces the output you are currently reading.
4. The Docker daemon streamed that output to the Docker client, which sent it to your terminal.

To try something more ambitious, you can run an Ubuntu container with:

```
$ docker run -it ubuntu bash
```

Share images, automate workflows, and more with a free Docker ID:

<https://hub.docker.com/>

For more examples and ideas, visit:

<https://docs.docker.com/get-started/>



Important - Note that if the image used to generate the container is not present on the host system, it is automatically downloaded from a repository (by default the **docker.io** repository) using the **docker pull** command.

Exit from your **CentOS_10.0.3.45_SSH** VM:

```
[root@centos8 ~]# exit
logout
[trainee@centos8 ~]$ exit
logout
Connection to 10.0.3.45 closed.
root@debian11:~#
```

1.2 - Starting a Container

Start a container from the ubuntu:latest image in interactive mode using the **-i** and **-t** options, passing **bash** as an argument so that it is launched when the container is started :

```
root@debian11:~# docker run -it ubuntu bash
Unable to find image 'ubuntu:latest' locally
latest: Pulling from library/ubuntu
b237fe92c417: Pull complete
Digest: sha256:ec050c32e4a6085b423d36ecd025c0d3ff00c38ab93a3d71a460ff1c44fa6d77
Status: Downloaded newer image for ubuntu:latest

root@83b0d8979a33:/# ls
bin boot dev etc home lib lib32 lib64 libx32 media mnt opt proc root run sbin srv sys tmp usr var

root@83b0d8979a33:/# cat /etc/lsb-release
DISTRIB_ID=Ubuntu
DISTRIB_RELEASE=22.04
DISTRIB_CODENAME=jammy
DISTRIB_DESCRIPTION="Ubuntu 22.04.3 LTS"
```



Important - Note that in this case the container is launched with **bash** as



the argument, which will launch `/bin/bash` in the container.

View the list of packages installed in the ubuntu container:

```
root@83b0d8979a33:/# dpkg -l
Desired=Unknown/Install/Remove/Purge/Hold
| Status=Not/Inst/Conf-files/Unpacked/halF-conf/Half-inst/trig-aWait/Trig-pend
|/ Err?=(none)/Reinst-required (Status,Err: uppercase=bad)
||/ Name                    Version                      Architecture Description
+++-----
```

Name	Version	Architecture	Description
ii adduser	3.118ubuntu5	all	add and remove users and groups
ii apt	2.4.9	amd64	commandline package manager
ii base-files	12ubuntu4.4	amd64	Debian base system miscellaneous files
ii base-passwd	3.5.52build1	amd64	Debian base system master password and group files
ii bash	5.1-6ubuntu1	amd64	GNU Bourne Again SHell
ii bsdtails	1:2.37.2-4ubuntu3	amd64	basic utilities from 4.4BSD-Lite
ii coreutils	8.32-4.1ubuntu1	amd64	GNU core utilities
ii dash	0.5.11+git20210903+057cd650a4ed-3build1	amd64	POSIX-compliant shell
ii debconf	1.5.79ubuntu1	all	Debian configuration management system
ii debianutils	5.5-1ubuntu2	amd64	Miscellaneous utilities specific to Debian
ii diffutils	1:3.8-0ubuntu2	amd64	File comparison utilities
ii dpkg	1.21.1ubuntu2.2	amd64	Debian package management system
ii e2fsprogs	1.46.5-2ubuntu1.1	amd64	ext2/ext3/ext4 file system utilities
ii findutils	4.8.0-1ubuntu3	amd64	utilities for finding files-- find, xargs
ii gcc-12-base:amd64	12.3.0-1ubuntu1~22.04	amd64	GCC, the GNU Compiler Collection (base package)

ii	gpgv	2.2.27-3ubuntu2.1	amd64	GNU privacy guard - signature verification tool
ii	grep	3.7-1build1	amd64	GNU grep, egrep and fgrep
ii	gzip	1.10-4ubuntu4.1	amd64	GNU compression utilities
ii	hostname	3.23ubuntu2	amd64	utility to set/show the host name or domain name
ii	init-system-helpers	1.62	all	helper tools for all init systems
ii	libacl1:amd64	2.3.1-1	amd64	access control list - shared library
ii	libapt-pkg6.0:amd64	2.4.9	amd64	package management runtime library
ii	libattr1:amd64	1:2.5.1-1build1	amd64	extended attribute handling - shared library
ii	libaudit-common	1:3.0.7-1build1	all	Dynamic library for security auditing - common files
ii	libaudit1:amd64	1:3.0.7-1build1	amd64	Dynamic library for security auditing
ii	libblkid1:amd64	2.37.2-4ubuntu3	amd64	block device ID library
ii	libbz2-1.0:amd64	1.0.8-5build1	amd64	high-quality block-sorting file compressor library - runtime
ii	libc-bin	2.35-0ubuntu3.1	amd64	GNU C Library: Binaries
ii	libc6:amd64	2.35-0ubuntu3.1	amd64	GNU C Library: Shared libraries
ii	libcap-ng0:amd64	0.7.9-2.2build3	amd64	An alternate POSIX capabilities library
ii	libcap2:amd64	1:2.44-1ubuntu0.22.04.1	amd64	POSIX 1003.1e capabilities (library)
ii	libcom-err2:amd64	1.46.5-2ubuntu1.1	amd64	common error description library
ii	libcrypt1:amd64	1:4.4.27-1	amd64	libcrypt shared library
ii	libdb5.3:amd64	5.3.28+dfsg1-0.8ubuntu3	amd64	Berkeley v5.3 Database Libraries [runtime]
ii	libdebconfclient0:amd64	0.261ubuntu1	amd64	Debian Configuration Management System (C-implementation library)
ii	libext2fs2:amd64	1.46.5-2ubuntu1.1	amd64	ext2/ext3/ext4 file system

libraries				
ii	libffi8:amd64	3.4.2-4	amd64	Foreign Function Interface
library runtime				
ii	libgcc-s1:amd64	12.3.0-1ubuntu1~22.04	amd64	GCC support library
ii	libgcrypt20:amd64	1.9.4-3ubuntu3	amd64	GPL Crypto library - runtime
library				
ii	libgmp10:amd64	2:6.2.1+dfsg-3ubuntu1	amd64	Multiprecision arithmetic
library				
ii	libgnutls30:amd64	3.7.3-4ubuntu1.2	amd64	GNU TLS library - main runtime
library				
ii	libgpg-error0:amd64	1.43-3	amd64	GnuPG development runtime
library				
ii	libgssapi-krb5-2:amd64	1.19.2-2ubuntu0.2	amd64	MIT Kerberos runtime libraries -
krb5 GSS-API Mechanism				
ii	libhogweed6:amd64	3.7.3-1build2	amd64	low level cryptographic library
(public-key cryptos)				
ii	libidn2-0:amd64	2.3.2-2build1	amd64	Internationalized domain names
(IDNA2008/TR46) library				
ii	libk5crypto3:amd64	1.19.2-2ubuntu0.2	amd64	MIT Kerberos runtime libraries -
Crypto Library				
ii	libkeyutils1:amd64	1.6.1-2ubuntu3	amd64	Linux Key Management Utilities
(library)				
ii	libkrb5-3:amd64	1.19.2-2ubuntu0.2	amd64	MIT Kerberos runtime libraries
ii	libkrb5support0:amd64	1.19.2-2ubuntu0.2	amd64	MIT Kerberos runtime libraries -
Support library				
ii	liblz4-1:amd64	1.9.3-2build2	amd64	Fast LZ compression algorithm
library - runtime				
ii	liblzma5:amd64	5.2.5-2ubuntu1	amd64	XZ-format compression library
ii	libmount1:amd64	2.37.2-4ubuntu3	amd64	device mounting library
ii	libncurses6:amd64	6.3-2ubuntu0.1	amd64	shared libraries for terminal
handling				
ii	libncursesw6:amd64	6.3-2ubuntu0.1	amd64	shared libraries for terminal
handling (wide character support)				
ii	libnettle8:amd64	3.7.3-1build2	amd64	low level cryptographic library

```

(symmetric and one-way cryptos)
ii libnsl2:amd64          1.3.0-2build2          amd64          Public client interface for
NIS(YP) and NIS+
ii libp11-kit0:amd64     0.24.0-6build1        amd64          library for loading and
coordinating access to PKCS#11 modules - runtime
ii libpam-modules:amd64  1.4.0-11ubuntu2.3     amd64          Pluggable Authentication Modules
for PAM
ii libpam-modules-bin    1.4.0-11ubuntu2.3     amd64          Pluggable Authentication Modules
for PAM - helper binaries
ii libpam-runtime        1.4.0-11ubuntu2.3     all           Runtime support for the PAM
library
ii libpam0g:amd64        1.4.0-11ubuntu2.3     amd64          Pluggable Authentication Modules
library
ii libpcre2-8-0:amd64    10.39-3ubuntu0.1      amd64          New Perl Compatible Regular
Expression Library- 8 bit runtime files
ii libpcre3:amd64        2:8.39-13ubuntu0.22.04.1 amd64          Old Perl 5 Compatible Regular
Expression Library - runtime files
ii libprocps8:amd64      2:3.3.17-6ubuntu2     amd64          library for accessing process
information from /proc
ii libseccomp2:amd64     2.5.3-2ubuntu2        amd64          high level interface to Linux
seccomp filter
ii libselinux1:amd64     3.3-1build2           amd64          SELinux runtime shared libraries
ii libsemanage-common    3.3-1build2           all           Common files for SELinux policy
management libraries
ii libsemanage2:amd64    3.3-1build2           amd64          SELinux policy management
library
ii libsepol2:amd64       3.3-1build1           amd64          SELinux library for manipulating
binary security policies
ii libsmartcols1:amd64   2.37.2-4ubuntu3       amd64          smart column output alignment
library
ii libss2:amd64          1.46.5-2ubuntu1.1     amd64          command-line interface parsing
library
ii libssl3:amd64         3.0.2-0ubuntu1.10     amd64          Secure Sockets Layer toolkit -
shared libraries

```

ii	libstdc++6:amd64	12.3.0-1ubuntu1~22.04	amd64	GNU Standard C++ Library v3
ii	libsystemd0:amd64	249.11-0ubuntu3.9	amd64	systemd utility library
ii	libtasn1-6:amd64	4.18.0-4build1	amd64	Manage ASN.1 structures
	(runtime)			
ii	libtinfo6:amd64	6.3-2ubuntu0.1	amd64	shared low-level terminfo
	library for terminal handling			
ii	libtirpc-common	1.3.2-2ubuntu0.1	all	transport-independent RPC
	library - common files			
ii	libtirpc3:amd64	1.3.2-2ubuntu0.1	amd64	transport-independent RPC
	library			
ii	libudev1:amd64	249.11-0ubuntu3.9	amd64	libudev shared library
ii	libunistring2:amd64	1.0-1	amd64	Unicode string library for C
ii	libuuid1:amd64	2.37.2-4ubuntu3	amd64	Universally Unique ID library
ii	libxxhash0:amd64	0.8.1-1	amd64	shared library for xxhash
ii	libzstd1:amd64	1.4.8+dfsg-3build1	amd64	fast lossless compression
	algorithm			
ii	login	1:4.8.1-2ubuntu2.1	amd64	system login tools
ii	logsave	1.46.5-2ubuntu1.1	amd64	save the output of a command in
	a log file			
ii	lsb-base	11.1.0ubuntu4	all	Linux Standard Base init script
	functionality			
ii	mawk	1.3.4.20200120-3	amd64	Pattern scanning and text
	processing language			
ii	mount	2.37.2-4ubuntu3	amd64	tools for mounting and
	manipulating filesystems			
ii	ncurses-base	6.3-2ubuntu0.1	all	basic terminal type definitions
ii	ncurses-bin	6.3-2ubuntu0.1	amd64	terminal-related programs and
	man pages			
ii	passwd	1:4.8.1-2ubuntu2.1	amd64	change and administer password
	and group data			
ii	perl-base	5.34.0-3ubuntu1.2	amd64	minimal Perl system
ii	procps	2:3.3.17-6ubuntu2	amd64	/proc file system utilities
ii	sed	4.8-1ubuntu2	amd64	GNU stream editor for
	filtering/transforming text			

```
ii sensible-utils          0.0.17          all          Utilities for sensible
alternative selection
ii sysvinit-utils         3.01-1ubuntu1   amd64        System-V-like utilities
ii tar                    1.34+dfsg-1ubuntu0.1.22.04.1 amd64        GNU version of the tar archiving
utility
ii ubuntu-keyring        2021.03.26      all          GnuPG keys of the Ubuntu archive
ii usrmerge              25ubuntu2       all          Convert the system to the merged
/usr directories scheme
ii util-linux            2.37.2-4ubuntu3 amd64        miscellaneous system utilities
ii zlib1g:amd64         1:1.2.11.dfsg-2ubuntu9.2 amd64        compression library - runtime
root@83b0d8979a33:/# exit
exit
root@debian11:~#
```

The options for the docker run command can be viewed with the command :

```
root@debian11:~# docker run --help

Usage: docker run [OPTIONS] IMAGE [COMMAND] [ARG...]

Create and run a new container from an image

Aliases:
  docker container run, docker run

Options:
  --add-host list Add a custom host-to-IP mapping (host:ip)
  --annotation map Add an annotation to the container (passed through to the OCI runtime) (default map[])
  -a, --attach list Attach to STDIN, STDOUT or STDERR
  --blkio-weight uint16 Block IO (relative weight), between 10 and 1000, or 0 to disable (default 0)
  --blkio-weight-device list Block IO weight (relative device weight) (default [])
  --cap-add list Add Linux capabilities
  --cap-drop list Drop Linux capabilities
  --cgroup-parent string Optional parent cgroup for the container
```

```
--cgroupns string Cgroup namespace to use (host|private)
                    host':    Run the container in the Docker host's cgroup namespace
                    'private': Run the container in its own private cgroup namespace
                    '':        Use the cgroup namespace as configured by the
                                default-cgroupns-mode option on the daemon (default)

--cidfile string Write the container ID to the file
--cpu-period int Limit CPU CFS (Completely Fair Scheduler) period
--cpu-quota int Limit CPU CFS (Completely Fair Scheduler) quota
--cpu-rt-period int Limit CPU real-time period in microseconds
--cpu-rt-runtime int Limit CPU real-time runtime in microseconds
-c, --cpu-shares int CPU shares (relative weight)
--cpus decimal Number of CPUs
--cpuset-cpus string CPUs in which to allow execution (0-3, 0,1)
--cpuset-mems string MEMs in which to allow execution (0-3, 0,1)
-d, --detach Run container in background and print container ID
--detach-keys string Override the key sequence for detaching a container
--device list Add a host device to the container
--device-cgroup-rule list Add a rule to the cgroup allowed devices list
--device-read-bps list Limit read rate (bytes per second) from a device (default [])
--device-read-iops list Limit read rate (IO per second) from a device (default [])
--device-write-bps list Limit write rate (bytes per second) to a device (default [])
--device-write-iops list Limit write rate (IO per second) to a device (default [])
--disable-content-trust Skip image verification (default true)
--dns list Set custom DNS servers
--dns-option list Set DNS options
--dns-search list Set custom DNS search domains
--domainname string Container NIS domain name
--entrypoint string Overwrite the default ENTRYPOINT of the image
-e, --env list Set environment variables
--env-file list Read in a file of environment variables
--expose list Expose a port or a range of ports
--gpus gpu-request GPU devices to add to the container ('all' to pass all GPUs)
--group-add list Add additional groups to join
--health-cmd string Command to run to check health
```

```
--health-interval duration Time between running the check (ms|s|m|h) (default 0s)
--health-retries int Consecutive failures needed to report unhealthy
--health-start-period duration Start period for the container to initialize before starting health-retries
countdown (ms|s|m|h) (default 0s)
--health-timeout duration Maximum time to allow one check to run (ms|s|m|h) (default 0s)
--help Print usage
-h, --hostname string Container host name
--init Run an init inside the container that forwards signals and reaps processes
-i, --interactive Keep STDIN open even if not attached
--ip string IPv4 address (e.g., 172.30.100.104)
--ip6 string IPv6 address (e.g., 2001:db8::33)
--ipc string IPC mode to use
--isolation string Container isolation technology
--kernel-memory bytes Kernel memory limit
-l, --label list Set meta data on a container
--label-file list Read in a line delimited file of labels
--link list Add link to another container
--link-local-ip list Container IPv4/IPv6 link-local addresses
--log-driver string Logging driver for the container
--log-opt list Log driver options
--mac-address string Container MAC address (e.g., 92:d0:c6:0a:29:33)
-m, --memory bytes Memory limit
--memory-reservation bytes Memory soft limit
--memory-swap bytes Swap limit equal to memory plus swap: '-1' to enable unlimited swap
--memory-swappiness int Tune container memory swappiness (0 to 100) (default -1)
--mount mount Attach a filesystem mount to the container
--name string Assign a name to the container
--network network Connect a container to a network
--network-alias list Add network-scoped alias for the container
--no-healthcheck Disable any container-specified HEALTHCHECK
--oom-kill-disable Disable OOM Killer
--oom-score-adj int Tune host's OOM preferences (-1000 to 1000)
--pid string PID namespace to use
--pids-limit int Tune container pids limit (set -1 for unlimited)
```

```
--platform string Set platform if server is multi-platform capable
--privileged Give extended privileges to this container
-p, --publish list Publish a container's port(s) to the host
-P, --publish-all Publish all exposed ports to random ports
--pull string Pull image before running ("always", "missing", "never") (default "missing")
-q, --quiet Suppress the pull output
--read-only Mount the container's root filesystem as read only
--restart string Restart policy to apply when a container exits (default "no")
--rm Automatically remove the container when it exits
--runtime string Runtime to use for this container
--security-opt list Security Options
--shm-size bytes Size of /dev/shm
--sig-proxy Proxy received signals to the process (default true)
--stop-signal string Signal to stop the container
--stop-timeout int Timeout (in seconds) to stop a container
--storage-opt list Storage driver options for the container
--sysctl map Sysctl options (default map[])
--tmpfs list Mount a tmpfs directory
-t, --tty Allocate a pseudo-TTY
--ulimit ulimit Ulimit options (default [])
-u, --user string Username or UID (format: <name|uid>[:<group|gid>])
--users string User namespace to use
--uts string UTS namespace to use
-v, --volume list Bind mount a volume
--volume-driver string Optional volume driver for the container
--volumes-from list Mount volumes from the specified container(s)
-w, --workdir string Working directory inside the container
```

1.3 - Viewing the List of Containers and Images

To view all containers, use the **docker ps** command with the **-a** option:

```
root@debian11:~# docker ps -a
```

CONTAINER ID	IMAGE	COMMAND	CREATED	STATUS	PORTS	NAMES
83b0d8979a33	ubuntu	"bash"	4 minutes ago	Exited (0) 2 minutes ago		upbeat_diffie
5d17db3bbb20	hello-world	"/hello"	16 hours ago	Exited (0) 16 hours ago		charming_hoover



Important - Note that each container can be referenced by its **CONTAINER ID** or by its **NAME**.

To view the list of images, use the **docker images** command:

```
root@debian11:~# docker images
REPOSITORY    TAG       IMAGE ID       CREATED        SIZE
ubuntu        latest    01f29b872827  2 weeks ago   77.8MB
hello-world   latest    9c7a54a9a43c  3 months ago  13.3kB
```



Important - Note that each image is referenced by its IMAGE ID.

1.4 - Searching for an Image in a Repository

To search for a docker image in the default repository, use the **docker search** command:

```
root@debian11:~# docker search --filter=stars=5 centos
NAME                DESCRIPTION                               STARS   OFFICIAL   AUTOMATED
centos              DEPRECATED; The official build of CentOS.  7627    [OK]
kasmweb/centos-7-desktop CentOS 7 desktop for Kasm Workspaces      40
couchbase/centos7-systemd centos7-systemd images with additional debug...  8      [OK]
dokken/centos-7     CentOS 7 image for kitchen-dokken         5
eclipse/centos_jdk8 CentOS, JDK8, Maven 3, git, curl, nmap, mc, ...  5      [OK]
```



Important - Note that each image is referenced by the NAME column. The NAME is in the format **repository/maintainer/name** except in the case where it is the “official” image of the publisher in which case the format is simply **repository/name**. The notion of STARS comes from Docker Hub and is an indication of community satisfaction.

1.5 - Deleting a Container from an Image

To remove a container from an image, the **docker rm** command should be used, referencing the container either by its **NAME** or by its CONTAINER ID :

```
root@debian11:~# docker ps -a
CONTAINER ID   IMAGE          COMMAND        CREATED        STATUS              PORTS          NAMES
83b0d8979a33  ubuntu        "bash"        5 minutes ago Exited (0) 4 minutes ago
5d17db3bbb20  hello-world   "/hello"      16 hours ago  Exited (0) 16 hours ago          charming_hoover

root@debian11:~# docker rm upbeat_diffie
upbeat_diffie

root@debian11:~# docker ps -a
CONTAINER ID   IMAGE          COMMAND        CREATED        STATUS              PORTS          NAMES
5d17db3bbb20  hello-world   "/hello"      16 hours ago  Exited (0) 16 hours ago          charming_hoover

root@debian11:~# docker images
REPOSITORY    TAG          IMAGE ID       CREATED        SIZE
ubuntu        latest      01f29b872827  2 weeks ago   77.8MB
hello-world   latest      9c7a54a9a43c  3 months ago  13.3kB
```



Important - Note that when using the CONTAINER ID, it is not necessary to use the whole ID. For example, in the case above, the CONTAINER ID of the **upbeat_diffie** container was **83b0d8979a33**. The delete command could have used **83b0d8979a33**, **83b0d8** or even **83b**.

1.6 -Creating an Image from a Modified Container

Modifying an image container:

```
root@debian11:~# docker run -it ubuntu

root@4377355f88c2:/# ls
bin boot dev etc home lib lib32 lib64 libx32 media mnt opt proc root run sbin srv sys tmp usr
var

root@4377355f88c2:/# rm -rf /home

root@4377355f88c2:/# ls
bin boot dev etc lib lib32 lib64 libx32 media mnt opt proc root run sbin srv sys tmp usr var

root@4377355f88c2:/# exit
exit
root@debian11:~#
</code>
```

<WRAP center round important 50%>

****Important**** - Note here the deletion of the ****home**** directory in the ****4377355f88c2**** container.

</WRAP>

See the difference between the container and the base image:

```
<code>
root@debian11:~# docker ps -a
CONTAINER ID   IMAGE          COMMAND                  CREATED              STATUS              PORTS              NAMES
4377355f88c2   ubuntu        "/bin/bash"             About a minute ago   Exited (0) About a minute ago
romantic_northcutt
5d17db3bbb20   hello-world    "/hello"                16 hours ago        Exited (0) 16 hours ago
charming_hoover

root@debian11:~# docker diff romantic_northcutt
C /root
A /root/.bash_history
D /home
```



Important - The output of the **docker diff** command contains letters with the following meanings: C = Create, D = Delete, A = Add.

Create another container from the base image:

```
root@debian11:~# docker run -it ubuntu

root@e4caf92a5ceb:/# ls
bin boot dev etc home lib lib32 lib64 libx32 media mnt opt proc root run sbin srv sys tmp usr
var

root@e4caf92a5ceb:/# exit
exit

root@debian11:~#
```



Important - In this new container, the **/home** directory is present given



that it was generated from the original image, unchanged since it was compiled.

Now create the **ubuntu_1** image from the first ubuntu container (in the case below - **romantic_northcutt**) using the **docker commit** command:

```
root@debian11:~# docker ps -a
CONTAINER ID   IMAGE          COMMAND          CREATED          STATUS          PORTS          NAMES
e4caf92a5ceb   ubuntu        "/bin/bash"     44 seconds ago  Exited (0) 32 seconds ago
affectionate_ishizaka
4377355f88c2   ubuntu        "/bin/bash"     6 hours ago     Exited (0) 6 hours ago
romantic_northcutt
5d17db3bbb20   hello-world   "/hello"        22 hours ago    Exited (0) 22 hours ago
charming_hoover

root@debian11:~# docker commit romantic_northcutt ubuntu_1
sha256:50d66f88b992b65d0a38c4b662fbdcc906477916240a90d214b35a42b939ea5f

root@debian11:~# docker images
REPOSITORY    TAG          IMAGE ID        CREATED          SIZE
ubuntu_1      latest      50d66f88b992   13 seconds ago  77.8MB
ubuntu        latest      01f29b872827   2 weeks ago     77.8MB
hello-world   latest      9c7a54a9a43c   3 months ago    13.3kB

root@debian11:~#
```

1.7 - Deleting an Image

Now create a container from the new **ubuntu_1** image:

```
root@debian11:~# docker run -it ubuntu_1

root@86e777ebaf2b:/# ls
```

```
bin boot dev etc lib lib32 lib64 libx32 media mnt opt proc root run sbin srv sys tmp usr var

root@86e777ebaf2b:/# exit
exit

root@debian11:~#
```



Important - Note the absence of the **home** directory in the **904215fb79b4** container.

Try deleting the **ubuntu_1** image:

```
root@debian11:~# docker rmi ubuntu_1
Error response from daemon: conflict: unable to remove repository reference "ubuntu_1" (must force) - container
86e777ebaf2b is using its referenced image 50d66f88b992

root@debian11:~# docker ps -a
CONTAINER ID   IMAGE          COMMAND          CREATED          STATUS          PORTS          NAMES
86e777ebaf2b  ubuntu_1      "/bin/bash"     About a minute ago  Exited (0)     About a minute ago  focused_colden
e4caf92a5ceb  ubuntu       "/bin/bash"     7 minutes ago    Exited (0)     7 minutes ago      affectionate_ishizaka
4377355f88c2  ubuntu       "/bin/bash"     6 hours ago      Exited (0)     6 hours ago        romantic_northcutt
5d17db3bbb20  hello-world  "/hello"        22 hours ago     Exited (0)     22 hours ago       charming_hoover
```



Important - Note that it is not possible to delete the **ubuntu_1** image while the **86e777ebaf2b** container is active.

Now delete the container identified by the error message (in the case above - **focused_colden**) as well as the **ubuntu_1** image:

```
root@debian11:~# docker rm focused_colden
focused_colden

root@debian11:~# docker ps -a
CONTAINER ID   IMAGE          COMMAND          CREATED          STATUS          PORTS          NAMES
e4caf92a5ceb   ubuntu        "/bin/bash"     10 minutes ago  Exited (0)     9 minutes ago
affectionate_ishizaka
4377355f88c2   ubuntu        "/bin/bash"     6 hours ago     Exited (0)     6 hours ago
romantic_northcutt
5d17db3bbb20   hello-world   "/hello"        22 hours ago    Exited (0)     22 hours ago
charming_hoover

root@debian11:~# docker rmi ubuntu_1
Untagged: ubuntu_1:latest
Deleted: sha256:50d66f88b992b65d0a38c4b662fbdcc906477916240a90d214b35a42b939ea5f
Deleted: sha256:c5fdbeldd17356fd868456c44949e0ca50c78a610a8917d7ad6ab372aeebce20

root@debian11:~# docker images
REPOSITORY    TAG          IMAGE ID        CREATED          SIZE
ubuntu        latest      01f29b872827   2 weeks ago     77.8MB
hello-world   latest      9c7a54a9a43c   3 months ago    13.3kB
```

To be able to delete all containers, list them by their **Container ID** :

```
root@debian11:~# docker ps -aq
e4caf92a5ceb
4377355f88c2
5d17db3bbb20
```

Delete all containers:

```
root@debian11:~# docker rm `docker ps -aq`
e4caf92a5ceb
```

```
4377355f88c2  
5d17db3bbb20
```

```
root@debian11:~# docker ps -aq
```

```
root@debian11:~#
```

To delete a container as soon as it finishes running, use the **-rm** option:

```
root@debian11:~# docker run -it --rm ubuntu
```

```
root@3b3d4d7be82b:/# ls
```

```
bin boot dev etc home lib lib32 lib64 libx32 media mnt opt proc root run sbin srv sys tmp usr  
var
```

```
root@3b3d4d7be82b:/# exit
```

```
exit
```

```
root@debian11:~# docker ps -aq
```

```
root@debian11:~#
```

1.8 - Creating a Container with a Specific Name

Now create a container with a specific name:

```
root@debian11:~# docker run -it --name=ittraining ubuntu
```

```
root@d838ea83033e:/# ls
```

```
bin boot dev etc home lib lib32 lib64 libx32 media mnt opt proc root run sbin srv sys tmp usr  
var
```

```
root@d838ea83033e:/# exit
```

```
exit

root@debian11:~# docker ps -a
CONTAINER ID   IMAGE     COMMAND                 CREATED          STATUS              PORTS          NAMES
d838ea83033e   ubuntu   "/bin/bash"           12 seconds ago  Exited (0) 4 seconds ago          ittraining
```

To obtain information about a container, use the **docker inspect** command:

```
root@debian11:~# docker inspect ittraining
[
  {
    "Id": "d838ea83033e6a5b324676ed6734e7ff9c69084dd453c52eedd367f31bcb83f3",
    "Created": "2023-08-19T11:47:56.464134219Z",
    "Path": "/bin/bash",
    "Args": [],
    "State": {
      "Status": "exited",
      "Running": false,
      "Paused": false,
      "Restarting": false,
      "OOMKilled": false,
      "Dead": false,
      "Pid": 0,
      "ExitCode": 0,
      "Error": "",
      "StartedAt": "2023-08-19T11:47:57.979606971Z",
      "FinishedAt": "2023-08-19T11:48:04.066624168Z"
    },
    "Image": "sha256:01f29b872827fa6f9aed0ea0b2ede53aea4ad9d66c7920e81a8db6d1fd9ab7f9",
    "ResolvConfPath":
"/var/lib/docker/containers/d838ea83033e6a5b324676ed6734e7ff9c69084dd453c52eedd367f31bcb83f3/resolv.conf",
    "HostnamePath":
"/var/lib/docker/containers/d838ea83033e6a5b324676ed6734e7ff9c69084dd453c52eedd367f31bcb83f3/hostname",
    "HostsPath":
```

```
"/var/lib/docker/containers/d838ea83033e6a5b324676ed6734e7ff9c69084dd453c52eedd367f31bcb83f3/hosts",
  "LogPath":
"/var/lib/docker/containers/d838ea83033e6a5b324676ed6734e7ff9c69084dd453c52eedd367f31bcb83f3/d838ea83033e6a5b3246
76ed6734e7ff9c69084dd453c52eedd367f31bcb83f3-json.log",
  "Name": "/ittraining",
  "RestartCount": 0,
  "Driver": "overlay2",
  "Platform": "linux",
  "MountLabel": "",
  "ProcessLabel": "",
  "AppArmorProfile": "docker-default",
  "ExecIDs": null,
  "HostConfig": {
    "Binds": null,
    "ContainerIDFile": "",
    "LogConfig": {
      "Type": "json-file",
      "Config": {}
    },
    "NetworkMode": "default",
    "PortBindings": {},
    "RestartPolicy": {
      "Name": "no",
      "MaximumRetryCount": 0
    },
    "AutoRemove": false,
    "VolumeDriver": "",
    "VolumesFrom": null,
    "ConsoleSize": [
      59,
      210
    ],
    "CapAdd": null,
    "CapDrop": null,
```

```
"CgroupnsMode": "private",
"Dns": [],
"DnsOptions": [],
"DnsSearch": [],
"ExtraHosts": null,
"GroupAdd": null,
"IpcMode": "private",
"Cgroup": "",
"Links": null,
"OomScoreAdj": 0,
"PidMode": "",
"Privileged": false,
"PublishAllPorts": false,
"ReadonlyRootfs": false,
"SecurityOpt": null,
"UTSMode": "",
"UsernsMode": "",
"ShmSize": 67108864,
"Runtime": "runc",
"Isolation": "",
"CpuShares": 0,
"Memory": 0,
"NanoCpus": 0,
"CgroupParent": "",
"BlkioWeight": 0,
"BlkioWeightDevice": [],
"BlkioDeviceReadBps": [],
"BlkioDeviceWriteBps": [],
"BlkioDeviceReadIOps": [],
"BlkioDeviceWriteIOps": [],
"CpuPeriod": 0,
"CpuQuota": 0,
"CpuRealtimePeriod": 0,
"CpuRealtimeRuntime": 0,
```

```
"CpusetCpus": "",
"CpusetMems": "",
"Devices": [],
"DeviceCgroupRules": null,
"DeviceRequests": null,
"MemoryReservation": 0,
"MemorySwap": 0,
"MemorySwappiness": null,
"OomKillDisable": null,
"PidsLimit": null,
"Ulimits": null,
"CpuCount": 0,
"CpuPercent": 0,
"IOMaximumIOps": 0,
"IOMaximumBandwidth": 0,
"MaskedPaths": [
  "/proc/asound",
  "/proc/acpi",
  "/proc/kcore",
  "/proc/keys",
  "/proc/latency_stats",
  "/proc/timer_list",
  "/proc/timer_stats",
  "/proc/sched_debug",
  "/proc/scsi",
  "/sys/firmware"
],
"ReadOnlyPaths": [
  "/proc/bus",
  "/proc/fs",
  "/proc/irq",
  "/proc/sys",
  "/proc/sysrq-trigger"
]
```

```
    },
    "GraphDriver": {
      "Data": {
        "LowerDir":
"/var/lib/docker/overlay2/b8f594ac72f3c9a57be0645a8d5686259ff8799d341626458808d999e35fbf8f-
init/diff:/var/lib/docker/overlay2/f932b6b3764a556a570060fd607da5e9082eb6d816e3568574a6104ebc80df5e/diff",
        "MergedDir":
"/var/lib/docker/overlay2/b8f594ac72f3c9a57be0645a8d5686259ff8799d341626458808d999e35fbf8f/merged",
        "UpperDir":
"/var/lib/docker/overlay2/b8f594ac72f3c9a57be0645a8d5686259ff8799d341626458808d999e35fbf8f/diff",
        "WorkDir":
"/var/lib/docker/overlay2/b8f594ac72f3c9a57be0645a8d5686259ff8799d341626458808d999e35fbf8f/work"
      },
      "Name": "overlay2"
    },
    "Mounts": [],
    "Config": {
      "Hostname": "d838ea83033e",
      "Domainname": "",
      "User": "",
      "AttachStdin": true,
      "AttachStdout": true,
      "AttachStderr": true,
      "Tty": true,
      "OpenStdin": true,
      "StdinOnce": true,
      "Env": [
        "PATH=/usr/local/sbin:/usr/local/bin:/usr/sbin:/usr/bin:/sbin:/bin"
      ],
      "Cmd": [
        "/bin/bash"
      ],
      "Image": "ubuntu",
      "Volumes": null,
```

```
    "WorkingDir": "",
    "Entrypoint": null,
    "OnBuild": null,
    "Labels": {
      "org.opencontainers.image.ref.name": "ubuntu",
      "org.opencontainers.image.version": "22.04"
    }
  },
  "NetworkSettings": {
    "Bridge": "",
    "SandboxID": "8896374679af4eed6bc5825722ef4f1d802910fba2d12cd87c777fad1338ebac",
    "HairpinMode": false,
    "LinkLocalIPv6Address": "",
    "LinkLocalIPv6PrefixLen": 0,
    "Ports": {},
    "SandboxKey": "/var/run/docker/netns/8896374679af",
    "SecondaryIPAddresses": null,
    "SecondaryIPv6Addresses": null,
    "EndpointID": "",
    "Gateway": "",
    "GlobalIPv6Address": "",
    "GlobalIPv6PrefixLen": 0,
    "IPAddress": "",
    "IPPrefixLen": 0,
    "IPv6Gateway": "",
    "MacAddress": "",
    "Networks": {
      "bridge": {
        "IPAMConfig": null,
        "Links": null,
        "Aliases": null,
        "NetworkID": "33b1d61a638b6114462bd420314077791ed32b132a4536ad7725420a58e11d3f",
        "EndpointID": "",
        "Gateway": "",
```

```
        "IPAddress": "",
        "IPPrefixLen": 0,
        "IPv6Gateway": "",
        "GlobalIPv6Address": "",
        "GlobalIPv6PrefixLen": 0,
        "MacAddress": "",
        "DriverOpts": null
    }
}
}
```

1.9 - Executing a Command in a Container

To execute a specific command in a container, pass the command as an argument:

```
root@debian11:~# docker run --rm ubuntu env
PATH=/usr/local/sbin:/usr/local/bin:/usr/sbin:/usr/bin:/sbin:/bin
HOSTNAME=9b7b7547c023
HOME=/root

root@debian11:~#
```

1.10 - Injecting Environment Variables into a Container

To inject one or more environment variables into a container, use a pre-established file:

```
root@debian11:~# vi env.list

root@debian11:~# cat env.list
```

```
EDITOR=vim
HOSTNAME=ubuntudocker
```

```
root@debian11:~# docker run --rm --env-file=env.list ubuntu env
PATH=/usr/local/sbin:/usr/local/bin:/usr/sbin:/usr/bin:/sbin:/bin
HOSTNAME=ubuntudocker
EDITOR=vim
HOME=/root

root@debian11:~#
```

1.11 - Modifying the Hostname of a Container

To change the hostname of a container, use the **-h** option:

```
root@debian11:~# docker run -it --rm -h ubuntudocker ubuntu

root@ubuntudocker:/# hostname
ubuntudocker

root@ubuntudocker:/# exit
exit
```

1.12 - Mapping Ports of a Container

Start a nginx container on port localhost 81 :

```
root@debian11:~# docker run -it -p 81:80 nginx
Unable to find image 'nginx:latest' locally
latest: Pulling from library/nginx
52d2b7f179e3: Pull complete
```

```
fd9f026c6310: Pull complete
055fa98b4363: Pull complete
96576293dd29: Pull complete
a7c4092be904: Pull complete
e3b6889c8954: Pull complete
da761d9a302b: Pull complete
Digest: sha256:104c7c5c54f2685f0f46f3be607ce60da7085da3eaa5ad22d3d9f01594295e9c
Status: Downloaded newer image for nginx:latest

^C

root@debian11:~#
```

Note that using ^C interrupted the container process:

```
root@debian11:~# docker ps -a
CONTAINER ID   IMAGE     COMMAND                  CREATED        STATUS              PORTS          NAMES
37cb0af1e97f   nginx    "/docker-entrypoint...." 46 seconds ago Created                                intelligent_fermi
d838ea83033e   ubuntu  "/bin/bash"              5 minutes ago  Exited (0) 5 minutes ago                                ittraining
```

1.13 - Starting a Container in Detached mode

Now start the nginx container in detached mode using the **-d** option:

```
root@debian11:~# docker run -d -p 81:80 nginx
5c2fe852965f700fff2d11baff034557c4956a7cd5eb54c51967d362415a76b4

root@debian11:~# docker ps -a
CONTAINER ID   IMAGE     COMMAND                  CREATED        STATUS              PORTS          NAMES
5c2fe852965f   nginx    "/docker-entrypoint...." 8 seconds ago  Up 6 seconds                                
```

```
0.0.0.0:81->80/tcp, :::81->80/tcp  priceless_yonath
37cb0af1e97f  nginx      "/docker-entripoint...."  About a minute ago  Created
intelligent_fermi
d838ea83033e  ubuntu    "/bin/bash"              5 minutes ago      Exited (0) 5 minutes ago
ittraining
```

1.14 - Accessing Container Services from the Outside

Install the **lynx** text browser:

```
root@debian11:~# apt-get install lynx
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
The following packages were automatically installed and are no longer required:
  libopengl0 linux-headers-5.10.0-15-amd64 linux-headers-5.10.0-15-common
Use 'apt autoremove' to remove them.
The following additional packages will be installed:
  lynx-common
The following NEW packages will be installed:
  lynx lynx-common
0 upgraded, 2 newly installed, 0 to remove and 0 not upgraded.
Need to get 1,844 kB of archives.
After this operation, 5,768 kB of additional disk space will be used.
Do you want to continue? [Y/n] y
```

Check that nginx responds to requests :

```
root@debian11:~# lynx --dump http://localhost:81
      Welcome to nginx!
```

If you see this page, the nginx web server is successfully installed and working. Further configuration is required.

```
For online documentation and support please refer to [1]nginx.org.  
Commercial support is available at [2]nginx.com.
```

```
Thank you for using nginx.
```

References

1. <http://nginx.org/>
2. <http://nginx.com/>

```
root@debian11:~#
```

1.15 - Stopping and Starting a Container

Stop the nginx container:

```
root@debian11:~# docker ps -a
```

CONTAINER ID	IMAGE	COMMAND	CREATED	STATUS	PORTS	NAMES
5c2fe852965f	nginx	"/docker-entrypoint...."	2 minutes ago	Up 2 minutes	0.0.0.0:81->80/tcp,	
37cb0af1e97f	nginx	"/docker-entrypoint...."	3 minutes ago	Created		
intelligent_fermi						
d838ea83033e	ubuntu	"/bin/bash"	8 minutes ago	Exited (0) 8 minutes ago		ittraining

```
root@debian11:~# docker stop 5c2f  
5c2f
```

```
root@debian11:~# docker ps -a
```

CONTAINER ID	IMAGE	COMMAND	CREATED	STATUS	PORTS	NAMES
5c2fe852965f	nginx	"/docker-entrypoint...."	3 minutes ago	Exited (0) 5 seconds ago		priceless_yonath
37cb0af1e97f	nginx	"/docker-entrypoint...."	4 minutes ago	Created		

```
intelligent_fermi
d838ea83033e  ubuntu  "/bin/bash"          8 minutes ago  Exited (0) 8 minutes ago  ittraining
```

Start the nginx container again:

```
root@debian11:~# docker start 5c2f
5c2f

root@debian11:~# docker ps -a
CONTAINER ID   IMAGE          COMMAND                  CREATED        STATUS          PORTS
NAMES
5c2fe852965f   nginx         "/docker-entrypoint...." 3 minutes ago  Up 2 seconds   0.0.0.0:81->80/tcp,
:::81->80/tcp  priceless_yonath
37cb0af1e97f   nginx         "/docker-entrypoint...." 4 minutes ago  Created
intelligent_fermi
d838ea83033e   ubuntu       "/bin/bash"             9 minutes ago  Exited (0) 9 minutes ago
ittraining
```

.16 - Using Signals with a Container

Use a signal to kill the nginx container process:

```
root@debian11:~# docker kill -s 9 5c2f
5c2f

root@debian11:~# docker ps -a
CONTAINER ID   IMAGE          COMMAND                  CREATED        STATUS          PORTS          NAMES
5c2fe852965f   nginx         "/docker-entrypoint...." 5 minutes ago  Exited (137) 5 seconds ago
priceless_yonath
37cb0af1e97f   nginx         "/docker-entrypoint...." 6 minutes ago  Created
intelligent_fermi
d838ea83033e   ubuntu       "/bin/bash"             11 minutes ago  Exited (0) 11 minutes ago
```

ittraining

Restart the container:

```
root@debian11:~# docker start 5c2f
5c2f
```

```
root@debian11:~# docker ps -a
CONTAINER ID   IMAGE     COMMAND                  CREATED        STATUS        PORTS
NAMES
5c2fe852965f   nginx    "/docker-entrypoint...." 6 minutes ago  Up 2 seconds  0.0.0.0:81->80/tcp, :::81->80/tcp   priceless_yonath
37cb0af1e97f   nginx    "/docker-entrypoint...." 7 minutes ago  Created
intelligent_fermi
d838ea83033e   ubuntu   "/bin/bash"             11 minutes ago Exited (0) 11 minutes ago
ittraining
```

```
root@debian11:~# docker restart 5c2f
5c2f
```

```
root@debian11:~# docker ps -a
CONTAINER ID   IMAGE     COMMAND                  CREATED        STATUS        PORTS
NAMES
5c2fe852965f   nginx    "/docker-entrypoint...." 6 minutes ago  Up 2 seconds  0.0.0.0:81->80/tcp, :::81->80/tcp   priceless_yonath
37cb0af1e97f   nginx    "/docker-entrypoint...." 7 minutes ago  Created
intelligent_fermi
d838ea83033e   ubuntu   "/bin/bash"             12 minutes ago Exited (0) 12 minutes ago
ittraining
```

.17 - Force Delete a Running Container

Delete a running container:

```
root@debian11:~# docker rm 5c2f
Error response from daemon: You cannot remove a running container
5c2fe852965f700fff2d11baff034557c4956a7cd5eb54c51967d362415a76b4. Stop the container before attempting removal or
force remove
```

```
root@debian11:~# docker ps -a
CONTAINER ID   IMAGE     COMMAND                  CREATED        STATUS              PORTS
NAMES
5c2fe852965f   nginx    "/docker-entrypoint...." 7 minutes ago  Up 58 seconds      0.0.0.0:81->80/tcp, :::81->80/tcp   priceless_yonath
37cb0af1e97f   nginx    "/docker-entrypoint...." 8 minutes ago  Created
intelligent_fermi
d838ea83033e   ubuntu   "/bin/bash"             13 minutes ago Exited (0) 12 minutes ago
ittraining
```

```
root@debian11:~# docker rm -f 5c2f
5c2f
```

```
root@debian11:~# docker ps -a
CONTAINER ID   IMAGE     COMMAND                  CREATED        STATUS              PORTS      NAMES
37cb0af1e97f   nginx    "/docker-entrypoint...." 8 minutes ago  Created
intelligent_fermi
d838ea83033e   ubuntu   "/bin/bash"             13 minutes ago Exited (0) 13 minutes ago
ittraining
```

1.18 - Simple Volume Usage

Create the index.html file and place it in the /root/www directory:

```
root@debian11:~# vi index.html

root@debian11:~# cat index.html
```

```
<html>
<body>
<center>nginx site home</center>
</body>
</html>

root@debian11:~# mv index.html www/

root@debian11:~#
```

Tell the container that its **/usr/share/nginx/html/** directory is replaced by the **/root/www/** directory on the host machine:

```
root@debian11:~# docker run -d -p 81:80 -v /root/www:/usr/share/nginx/html:ro nginx
5bec576b4b69b3dbd4cb58305a80d5ac94d42312b486e99dac94f82ba6541e3c

root@debian11:~# lynx --dump http://localhost:81
                        Home of the nginx site

root@debian11:~#
```



Important - Note here the use of **ro** - read-only.

1.19 - Downloading an image without creating a container

Download the centos image without creating a container:

```
root@debian11:~# docker pull centos
Using default tag: latest
latest: Pulling from library/centos
ald0c7532777: Pull complete
```

```
Digest: sha256:a27fd8080b517143cbbbab9dfb7c8571c40d67d534bbdee55bd6c473f432b177
Status: Downloaded newer image for centos:latest
docker.io/library/centos:latest
```

Check the contents of the image by creating a container :

```
root@debian11:~# docker run -it centos bash

[root@b45b7b136f06 /]# cat /etc/redhat-release
CentOS Linux release 8.4.2105

[root@b45b7b136f06 /]# rpm -qa | more
crypto-policies-20210209-1.gitbfb6bed.el8_3.noarch
python3-pip-wheel-9.0.3-19.el8.noarch
ncurses-base-6.1-7.20180224.el8.noarch
dnf-data-4.4.2-11.el8.noarch
dhcp-common-4.3.6-44.0.1.el8.noarch
centos-gpg-keys-8-2.el8.noarch
centos-linux-repos-8-2.el8.noarch
filesystem-3.8-3.el8.x86_64
pcre2-10.32-2.el8.x86_64
ncurses-libs-6.1-7.20180224.el8.x86_64
glibc-common-2.28-151.el8.x86_64
bash-4.4.19-14.el8.x86_64
zlib-1.2.11-17.el8.x86_64
bzip2-libs-1.0.6-26.el8.x86_64
libgpg-error-1.31-1.el8.x86_64
elfutils-libelf-0.182-3.el8.x86_64
libcom_err-1.45.6-1.el8.x86_64
libxml2-2.9.7-9.el8.x86_64
expat-2.2.5-4.el8.x86_64
libuuid-2.32.1-27.el8.x86_64
chkconfig-1.13-2.el8.x86_64
gmp-6.1.2-10.el8.x86_64
```

```
libattr-2.4.48-3.el8.x86_64
coreutils-single-8.30-8.el8.x86_64
sed-4.5-2.el8.x86_64
libcap-ng-0.7.9-5.el8.x86_64
libsmartcols-2.32.1-27.el8.x86_64
lz4-libs-1.8.3-2.el8.x86_64
file-libs-5.33-16.el8_3.1.x86_64
p11-kit-0.23.22-1.el8.x86_64
cracklib-2.9.6-15.el8.x86_64
libunistring-0.9.9-3.el8.x86_64
libassuan-2.5.1-3.el8.x86_64
keyutils-libs-1.5.10-6.el8.x86_64
libnl3-3.5.0-1.el8.x86_64
p11-kit-trust-0.23.22-1.el8.x86_64
pcre-8.42-4.el8.x86_64
systemd-libs-239-45.el8.x86_64
dbus-tools-1.12.8-12.el8.x86_64
libusbx-1.0.23-4.el8.x86_64
ca-certificates-2020.2.41-80.0.el8_2.noarch
libdb-5.3.28-40.el8.x86_64
iproute-5.9.0-4.el8.x86_64
libdb-utils-5.3.28-40.el8.x86_64
tpm2-tss-2.3.2-3.el8.x86_64
xz-5.2.4-3.el8.x86_64
ethtool-5.8-5.el8.x86_64
libsemanage-2.9-6.el8.x86_64
dbus-daemon-1.12.8-12.el8.x86_64
libfdisk-2.32.1-27.el8.x86_64
mpfr-3.1.6-1.el8.x86_64
gnutls-3.6.14-7.el8_3.x86_64
snappy-1.1.8-3.el8.x86_64
libmetalink-0.1.3-7.el8.x86_64
libksba-1.3.5-7.el8.x86_64
ipcalc-0.2.4-4.el8.x86_64
```

```
libseccomp-2.5.1-1.el8.x86_64
gawk-4.2.1-2.el8.x86_64
--More--
[q]
[root@b45b7b136f06 /]#
```

1.20 - Attaching to a running container

Stop the container. Start the container and then attach to the container:

```
[root@b45b7b136f06 /]# exit
exit

root@debian11:~# docker ps -a
CONTAINER ID   IMAGE          COMMAND                  CREATED        STATUS          PORTS
NAMES
b45b7b136f06   centos        "bash"                  3 minutes ago Exited (0) 8 seconds ago
quizzical_cray
5bec576b4b69   nginx        "/docker-entrypoint...." 4 minutes ago Up 4 minutes
0.0.0.0:81->80/tcp, :::81->80/tcp elegant_shockley
37cb0af1e97f   nginx        "/docker-entrypoint...." 27 minutes ago Created
intelligent_fermi
d838ea83033e   ubuntu      "/bin/bash"            32 minutes ago Exited (0) 31 minutes ago
ittraining

root@debian11:~# docker start b45b
b45b

root@debian11:~# docker attach b45b

[root@b45b7b136f06 /]# ls
bin dev etc home lib lib64 lost+found media mnt opt proc root run sbin srv sys tmp usr var
```

```
[root@b45b7b136f06 /]#
```

1.21 - Installing software in the container

Repair CentOS 8 repositories:

```
[root@b45b7b136f06 /]# sed -i 's/mirrorlist/#mirrorlist/g' /etc/yum.repos.d/CentOS-Linux-*

[root@b45b7b136f06 /]# sed -i 's|#baseurl=http://mirror.centos.org|baseurl=http://vault.centos.org|g'
/etc/yum.repos.d/CentOS-Linux-*

[root@b45b7b136f06 /]# yum upgrade -y
...
```

Create the file **/etc/yum.repos.d/mongodb-org-4.2.repo** :

```
[root@b45b7b136f06 /]# vi /etc/yum.repos.d/mongodb-org-4.2.repo

[root@b45b7b136f06 /]# cat /etc/yum.repos.d/mongodb-org-4.2.repo
[mongodb-org-4.2]
name=MongoDB Repository
baseurl=https://repo.mongodb.org/yum/redhat/$releasever/mongodb-org/4.2/x86_64/
gpgcheck=1
enabled=1
gpgkey=https://www.mongodb.org/static/pgp/server-4.2.as[mongodb-org-4.2]
name=MongoDB Repository
baseurl=https://repo.mongodb.org/yum/redhat/$releasever/mongodb-org/4.2/x86_64/
gpgcheck=1
enabled=1
gpgkey=https://www.mongodb.org/static/pgp/server-4.2.asc
```

Install mongo :


```
https://docs.mongodb.com/
Questions? Try the MongoDB Developer Community Forums
https://community.mongodb.com
Server has startup warnings:
2023-08-19T13:53:35.327+0000 I CONTROL [initandlisten]
2023-08-19T13:53:35.327+0000 I CONTROL [initandlisten] ** WARNING: Access control is not enabled for the
database.
2023-08-19T13:53:35.327+0000 I CONTROL [initandlisten] ** Read and write access to data and configuration is
unrestricted.
2023-08-19T13:53:35.327+0000 I CONTROL [initandlisten] ** WARNING: You are running this process as the root user,
which is not recommended.
2023-08-19T13:53:35.327+0000 I CONTROL [initandlisten]
2023-08-19T13:53:35.327+0000 I CONTROL [initandlisten]
2023-08-19T13:53:35.327+0000 I CONTROL [initandlisten] ** WARNING: /sys/kernel/mm/transparent_hugepage/enabled is
'always'.
2023-08-19T13:53:35.327+0000 I CONTROL [initandlisten] ** We suggest setting it to 'never'
2023-08-19T13:53:35.327+0000 I CONTROL [initandlisten]
---
Enable MongoDB's free cloud-based monitoring service, which will then receive and display
metrics about your deployment (disk utilization, CPU, operation statistics, etc).

The monitoring data will be available on a MongoDB website with a unique URL accessible to you
and anyone you share the URL with. MongoDB may use this information to make product
improvements and to suggest MongoDB products and deployment options to you.

To enable free monitoring, run the following command: db.enableFreeMonitoring()
To permanently disable this reminder, run the following command: db.disableFreeMonitoring()
---
>
```

Exit mongo and the container :

```
> exit
```

```
bye
[root@b45b7b136f06 /]# exit
exit
root@debian11:~#
```

1.22 - Using the docker commit command

Now create a new image from your container:

```
root@debian11:~# docker ps -a
CONTAINER ID   IMAGE     COMMAND                  CREATED        STATUS                    PORTS
NAMES
b45b7b136f06   centos    "bash"                  2 hours ago   Exited (0) 31 seconds ago
quizzical_cray
5bec576b4b69   nginx    "/docker-entrypoint...." 2 hours ago   Up 2 hours                0.0.0.0:81->80/tcp,
:::81->80/tcp   elegant_shockley
37cb0af1e97f   nginx    "/docker-entrypoint...." 2 hours ago   Created
intelligent_fermi
d838ea83033e   ubuntu   "/bin/bash"            2 hours ago   Exited (0) 2 hours ago
ittraining

root@debian11:~# docker commit b45b ittraining/mongodb
sha256:0ebd6759e69e3c345087dea3c9743a9d0fad81ca750842f1ff0004cbffabd8ae

root@debian11:~#
```

Delete the container used to create the image:

```
root@debian11:~# docker rm b45b
b45b

root@debian11:~# docker ps -a
CONTAINER ID   IMAGE     COMMAND                  CREATED        STATUS                    PORTS
```

```
NAMES
5bec576b4b69  nginx    "/docker-entripoint...."  2 hours ago  Up 2 hours          0.0.0.0:81->80/tcp,
:::81->80/tcp  elegant_shockley
37cb0af1e97f  nginx    "/docker-entripoint...."  2 hours ago  Created
intelligent_fermi
d838ea83033e  ubuntu  "/bin/bash"              2 hours ago  Exited (0) 2 hours ago
ittraining
```

Use the new image to launch a container named **mongo** :

```
root@debian11:~# docker run -it --name mongo ittraining/mongodb

[root@0c597fe7b628 /]# ls /usr/bin/mongo*
/usr/bin/mongo /usr/bin/mongod /usr/bin/mongodump /usr/bin/mongoexport /usr/bin/mongofiles
/usr/bin/mongoimport /usr/bin/mongorestore /usr/bin/mongos /usr/bin/mongostat /usr/bin/mongotop

[root@0c597fe7b628 /]# ps aux
USER          PID %CPU %MEM    VSZ   RSS TTY      STAT START   TIME COMMAND
root           1  0.0  0.0  15100  3704 pts/0    Ss   14:01   0:00 bash
root          18  0.0  0.0  47604  3696 pts/0    R+   14:01   0:00 ps aux
```

Edit the /etc/bashrc file:

```
[root@0c597fe7b628 /]# echo "/usr/bin/mongod --config /etc/mongod.conf &" >> /etc/bashrc

[root@0c597fe7b628 /]# tail /etc/bashrc
    fi
done

    unset i
    unset -f pathmunge
fi

fi
```

```
# vim:ts=4:sw=4
/usr/bin/mongod --config /etc/mongod.conf &

[root@0c597fe7b628 /]#
```

Check the list of containers and retrieve the CONTAINER ID of the **mongo** container:

```
[root@0c597fe7b628 /]# exit
exit

root@debian11:~# docker ps -a
CONTAINER ID   IMAGE          COMMAND                  CREATED        STATUS
PORTS         NAMES
0c597fe7b628   ittraining/mongodb  "bash"                  About a minute ago  Exited (0) 7 seconds ago
mongo
5bec576b4b69   nginx         "/docker-entrypoint...." 2 hours ago      Up 2 hours
0.0.0.0:81->80/tcp, :::81->80/tcp  elegant_shockley
37cb0af1e97f   nginx         "/docker-entrypoint...." 2 hours ago      Created
intelligent_fermi
d838ea83033e   ubuntu       "/bin/bash"             2 hours ago      Exited (0) 2 hours ago
ittraining

root@debian11:~#
```

Use the commit command to “save” the change in the image:

```
root@debian11:~# docker commit 0c59 ittraining/mongodb
sha256:3daa95515db6c3f1bd7e30a29c52d3bd5ea14207c05d9401bc2da91d54adbb3f
```

Start the container again to check that mongod is working:

```
root@debian11:~# docker rm 0c59
0c59
```



```
gpg: Total number processed: 1
gpg:             imported: 1

root@debian11:~# echo "deb [trusted=yes] http://repo.mongodb.org/apt/debian stretch/mongodb-org/4.0 main" | tee
/etc/apt/sources.list.d/mongodb-org-4.0.list
deb [trusted=yes] http://repo.mongodb.org/apt/debian stretch/mongodb-org/4.0 main

root@debian11:~# apt-get update
...
```

This time, install only the mongodb client:

```
root@debian11:~# apt-get install mongodb-org-shell
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
The following packages were automatically installed and are no longer required:
  libopengl0 linux-headers-5.10.0-15-amd64 linux-headers-5.10.0-15-common
Use 'apt autoremove' to remove them.
The following NEW packages will be installed:
  mongodb-org-shell
0 upgraded, 1 newly installed, 0 to remove and 5 not upgraded.
Need to get 9,970 kB of archives.
After this operation, 40.3 MB of additional disk space will be used.
Get:1 http://repo.mongodb.org/apt/debian stretch/mongodb-org/4.0/main amd64 mongodb-org-shell amd64 4.0.28 [9,970
kB]
Fetched 9,970 kB in 1s (10.8 MB/s)
Selecting previously unselected package mongodb-org-shell.
(Reading database ... 166761 files and directories currently installed.)
Preparing to unpack .../mongodb-org-shell_4.0.28_amd64.deb ...
Unpacking mongodb-org-shell (4.0.28) ...
Setting up mongodb-org-shell (4.0.28) ...
Processing triggers for man-db (2.9.4-2) ...
```

Note that at this stage the container does not have an IP address because it is not started:

```
root@debian11:~# docker inspect mongo | grep IP
  "LinkLocalIPv6Address": "",
  "LinkLocalIPv6PrefixLen": 0,
  "SecondaryIPAddresses": null,
  "SecondaryIPv6Addresses": null,
  "GlobalIPv6Address": "",
  "GlobalIPv6PrefixLen": 0,
  "IPAddress": "",
  "IPPrefixLen": 0,
  "IPv6Gateway": "",
    "IPAMConfig": null,
    "IPAddress": "",
    "IPPrefixLen": 0,
    "IPv6Gateway": "",
    "GlobalIPv6Address": "",
    "GlobalIPv6PrefixLen": 0,
```

So start the container and look for its IP address :

```
root@debian11:~# docker start mongo
mongo

root@debian11:~# docker inspect mongo | grep IP
  "LinkLocalIPv6Address": "",
  "LinkLocalIPv6PrefixLen": 0,
  "SecondaryIPAddresses": null,
  "SecondaryIPv6Addresses": null,
  "GlobalIPv6Address": "",
  "GlobalIPv6PrefixLen": 0,
  "IPAddress": "172.17.0.3",
  "IPPrefixLen": 16,
  "IPv6Gateway": "",
```

```
"IPAMConfig": null,  
"IPAddress": "172.17.0.3",  
"IPPrefixLen": 16,  
"IPv6Gateway": "",  
"GlobalIPv6Address": "",  
"GlobalIPv6PrefixLen": 0,
```

```
root@debian11:~#
```

Now connect to your mongodb from the host machine :

```
root@debian11:~# mongo --host 172.17.0.3  
MongoDB shell version v4.0.28  
connecting to: mongodb://172.17.0.3:27017/?gssapiServiceName=mongodb  
Implicit session: session { "id" : UUID("c1fadd17-a76c-4ca2-aa0e-b06498c55ba5") }  
MongoDB server version: 4.2.24  
WARNING: shell and server versions do not match  
Welcome to the MongoDB shell.  
For interactive help, type "help".  
For more comprehensive documentation, see  
  http://docs.mongodb.org/  
Questions? Try the support group  
  http://groups.google.com/group/mongodb-user  
Server has startup warnings:  
2023-08-19T14:43:49.070+0000 I CONTROL [initandlisten]  
2023-08-19T14:43:49.070+0000 I CONTROL [initandlisten] ** WARNING: Access control is not enabled for the  
database.  
2023-08-19T14:43:49.070+0000 I CONTROL [initandlisten] ** Read and write access to data and configuration is  
unrestricted.  
2023-08-19T14:43:49.070+0000 I CONTROL [initandlisten] ** WARNING: You are running this process as the root user,  
which is not recommended.  
2023-08-19T14:43:49.070+0000 I CONTROL [initandlisten]  
2023-08-19T14:43:49.070+0000 I CONTROL [initandlisten]  
2023-08-19T14:43:49.070+0000 I CONTROL [initandlisten] ** WARNING: /sys/kernel/mm/transparent_hugepage/enabled is
```

```
'always'.
2023-08-19T14:43:49.070+0000 I CONTROL [initandlisten] ** We suggest setting it to 'never'
2023-08-19T14:43:49.070+0000 I CONTROL [initandlisten]
---
Enable MongoDB's free cloud-based monitoring service, which will then receive and display
metrics about your deployment (disk utilization, CPU, operation statistics, etc).

The monitoring data will be available on a MongoDB website with a unique URL accessible to you
and anyone you share the URL with. MongoDB may use this information to make product
improvements and to suggest MongoDB products and deployment options to you.

To enable free monitoring, run the following command: db.enableFreeMonitoring()
To permanently disable this reminder, run the following command: db.disableFreeMonitoring()
---

> exit
bye
root@debian11:~#
```